


RM...
搅拌机专用减速机
Specially for stirrer drives

R系列减速机有以下设计方案:


R series gear units are available in the following designs:

R (RF, RX, RXF) ... Y...
电机用户自配或配特殊电机时
需加连接法兰
When equipping the user's motor
or the special one, the flange is
required to be connected


R

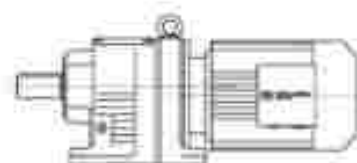


R...Y...
底脚轴伸式安装斜齿轮减速机
Foot-mounted helical gear
units with solid shaft

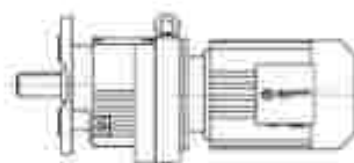


RF...Y...
法兰轴伸式安装斜齿轮减速机
Flange-mounted helical gear
units with solid shaft




RX...Y...
底脚轴伸式安装单级斜齿轮减速机
Foot-mounted single-stage helical
gear units with solid shaft




RS...
底脚轴伸式安装, 轴输入的斜齿轮减速机
Foot-mounted, shaft input helical gear
units with solid shaft




RFS...
法兰轴伸式, 轴输入为斜齿轮减速机
Flange-mounted, shaft input helical
gear units with solid shaft




RXF...Y...
法兰轴伸式安装单级斜齿轮减速机
Flange-mounted single-stage
helical gear units with solid shaft

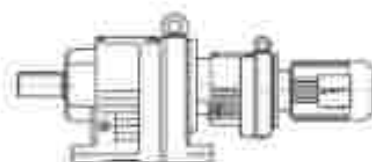

R...R...Y...
底脚轴伸式安装组合型斜齿轮减速机
Foot-mounted combinatorial helical
gear units with solid shaft

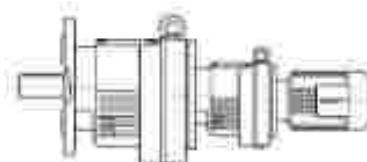


RF...R...Y...
法兰轴伸式组合型斜齿轮减速机
Flange-mounted combinatorial
helical gear units with solid shaft



RXS...
底脚轴伸式安装, 轴输入的单级
斜齿轮减速机
Foot-mounted, shaft input single
-stage helical gear units with
solid shaft



R...RS...
底脚轴伸式安装组合型, 轴输入
的斜齿轮减速机
Foot-mounted combinatorial
shaft input helical gear units
with solid shaft



RF...RS...
法兰轴伸式组合型, 轴输入
的斜齿轮减速机
Flange-mounted combinatorial
shaft input helical gear units with
solid shaft




RXFS...
法兰轴伸式, 轴输入的单级斜齿轮减速机
Flange-mounted, shaft input single
-stage helical gear units with solid
shaft

型号与标记 / Type Designations:

R 38-Y1.1-4P-32.4-M1-I-Φ200-G-78-CW 减速机类型 结构形式 规格 电机代号 电机功率、极数 传动比 安装形式 电机接线盒位置 输出法兰尺寸 联接法兰 附件代号 输出轴转向	R 38-Y1.1-4P-32.4-M1-I-Φ200-G-78-CW Gear units type Structure Size Motor code Motor power, pole Ratio Mounting position Position of the motor terminal box Outer diameter of output flange Coupling flange Add-on piece code Rotate direction of output shaft Gear units type
减速机类型: 斜齿硬齿面减速机 结构形式: 普通制式(普通) 轴伸制式 普通制式, 轴输入 轴伸制式, 轴输入 轴伸制式, 轴输入 轴伸制式, 轴输入	rigid tooth flank helical gear units Structure: Foot-mounted solid shaft output (-) Flange-mounted solid shaft output F Foot-mounted solid shaft output, shaft input S Flange-mounted solid shaft output, shaft input FS Specialty for stirrer M
规格: (见选型参数表)	Size: (see selection table)
电机代号: 普通 Y 防爆 YB 变频 YD 多速 YD 变频 YVF 变频 YVF 变频 YVF 变频 YVF 变频 YVF	Motor code: Ordinary Y Flame-proof YB Brake YEJ Multi-speed YD Variable frequency YVF Holding in metalizing YZ Variable frequency and brake YVFEJ Roller tables YG
电机功率、极数: (见选型参数表)	Motor power, pole: (see selection table)
传动比: (见选型参数表)	Ratio: (see selection table)
安装形式: M1, M2, M3, M4, M5, M6 (见第32页)	Mounting position: M1, M2, M3, M4, M5, M6 (see page 32)
电机接线盒位置: I, II, III, IV, V, VI, VII, VIII (见第31页)	Position of the motor terminal box: I, II, III, IV, V, VI, VII, VIII (see page 31)
输出法兰外径: (见外型安装尺寸图) 底脚安装时省略	Outer diameter of output flange: (see the chart of mounting dimension sheets overview)
联接法兰: 配直联电机 省略 配标准电机 G/GS (联接法兰双密封) 输入带轴 AD	Coupling flange: With integrated motor No marking With standard motor G/GS (double seal connecting flange) Solid input shaft AD
附件代号: 补偿油箱 57 制动器 78 电机底座 70	Add-on piece code: Compensation tank 57 Backstop 78 Motor bell housing 70
输出轴转向: (面对输出轴方向) 顺时针旋转 CW 逆时针旋转 CCW 不带制动器 可省略	Rotate direction of output shaft (viewing on output shaft): Clockwise CW Counter clockwise CCW Without Backstop No Marking
电机接线盒位置: (M1安装时, 从电机尾部看) Position of the motor terminal box:	Diagram showing terminal box positions I, II, III, IV, V, VI, VII, VIII.

安装形式: Mounting position:

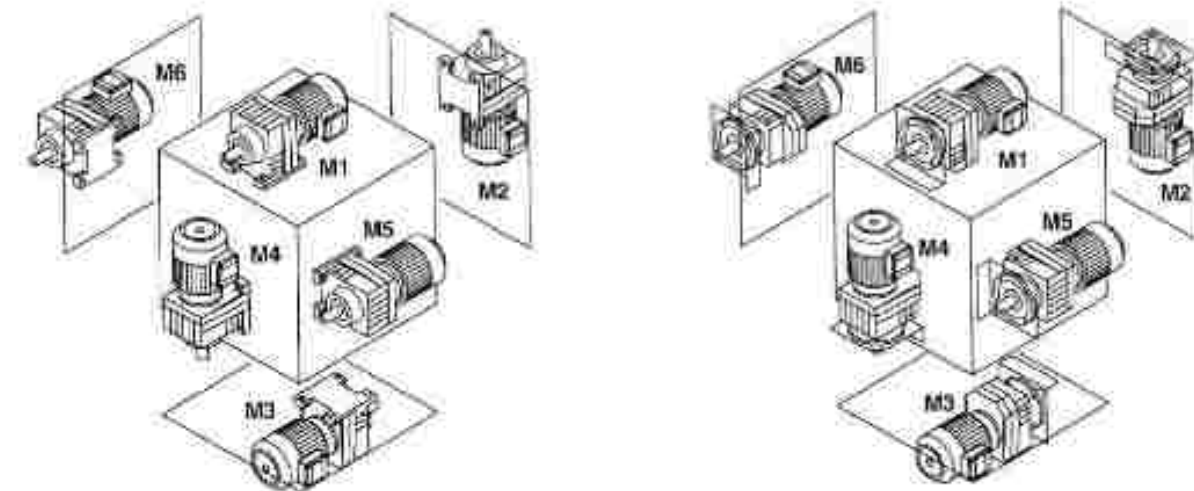

输入功率及最大转矩* Input power rating and maximum torque

规格 Size	18	25	38	48	58	68	78	88	98	108	128	138	148	168	178	188
结构形式 Structure	R								RF							
输入功率 Input power rating (kW)	0.18-0.75	0.18-3	0.18-3	0.18-5.5	0.18-7.5	0.18-7.5	0.18-11	0.55-22	0.55-30	2.2-45	2.2-45	5.5-85	11-90	11-160	11-200	11-200
传动比 Ratio	3.63-74.64	3.37-135.09	3.41-134.82	3.53-176.88	4.39-188.88	4.29-199.81	5.31-195.24	5.30-246.54	4.50-289.74	4.92-249.97	4.47-279.08	5.15-222.60	5.00-163.31	5.77-196.90	5.52-227.97	9.54-191.32
最大转矩 Maximum torque (N.m)	85	135	255	300	450	500	820	1550	3000	4300	6300	8000	13000	18000	32000	50000

规格 Size	38	58	68	78	88	98	108	128	158
结构形式 Structure	RX				RXF				
输入功率 (kW) Input power rating	0.18-1.1	0.18-5.5	0.18-7.5	1.1-11	3-22	5.5-30	7.5-45	7.5-90	11-132
传动比 Ratio	1.35-4.79	1.3-5.5	1.4-6.07	1.42-8.00	1.39-8.65	1.42-8.23	1.44-8.68	1.58-7.00	1.63-7.62
最大转矩 (N.m) Maximum torque	20	70	135	215	400	600	830	1110	1680

减速机重量 Gear unit weight

规格 Size	R18	R25	R38	R48	R58	R68	R78	R88	R98	R108	R128	R138	R148
重量 (kg) Weight	9	10	11	16	20	25.5	37	67	99	154	210	238	370
机型号 Gear unit type	RX38	RX58	RX68	RX78	RX88	RX98	RX108	RX128	RX158	R168	R178	R188	
重量 (kg) Weight	5	8	14	23	39	70	100	150	250	630	980	1400	

重量为平均值, 仅供参考。
*) 最大转矩系按该规格不同传动比对应的最大转矩中的最大值。

The weights are mean values, only for reference.
*) Maximum torque means the biggest one of the maximum torque related to the different ratio for the specified size.

RM减速机选型

选择最小使用系数

$L_{10h} \geq 10000$ h, 取 $f_{Am} = 1.5$

$L_{10h} \geq 25000$ h, 取 $f_{Am} = 2.0$

其它要求

根据最小使用系数选择齿轮箱规格

$f_{Am} \leq f_n$

校核径向载荷 (轴承)

$F_r \leq F_{rL} = F_{r0} \cdot a/(x+b)$

F_r — 运行时的径向载荷

F_{rL} — 许用径向载荷 (距离轴肩x处)

F_{r0} — 许用径向载荷 (距离轴肩1000mm)

a, b — 换算系数

x — 力作用点与轴肩距离

校核轴向载荷

$F_a \leq F_{a0}$

F_a — 运行时的轴向载荷

F_{a0} — 许用轴向载荷

许用径向载荷 F_{r0} (x = 1000 mm)

Permitted overhung loads F_{r0} at x=1000 mm

型号 Size	RM68	RM78	RM88	RM98	RM108	RM138	RM148	RM168
F_{r0} (N)	580	1200	1950	3000	4230	7500	11000	14600

计算径向载荷 F_{rL} (x ≠ 1000mm) 的换算系数

Conversion factors to calculate the permitted overhung loads F_{rL} at x ≠ 1000mm

型号 Size	RM68	RM78	RM88	RM98	RM108	RM138	RM148	RM168
a	1047	1050	1056.5	1061	1069	1088	1091	1089.5
b	47	50	56.5	61	69	88	91	89.5

RM Gear Units Selection

Select minimum service factors

$f_{Am} = 1.5$ for $L_{10h} \geq 10000$ h

$f_{Am} = 2.0$ for $L_{10h} \geq 25000$ h

Other requirements

Select gear units size based on minimum service factor

$f_{Am} \leq f_n$

Check overhung load (Bearing)

$F_r \leq F_{rL} = F_{r0} \cdot a/(x+b)$

F_r — Overhung load during operation

F_{rL} — Permitted overhung load (at x)

F_{r0} — Permitted overhung load (at 1000mm)

a, b — Conversion factor


x — distance between force point and shaft shoulder

Check axial load

$F_a \leq F_{a0}$

F_a — Axial load during operation

F_{a0} — Permitted axial load

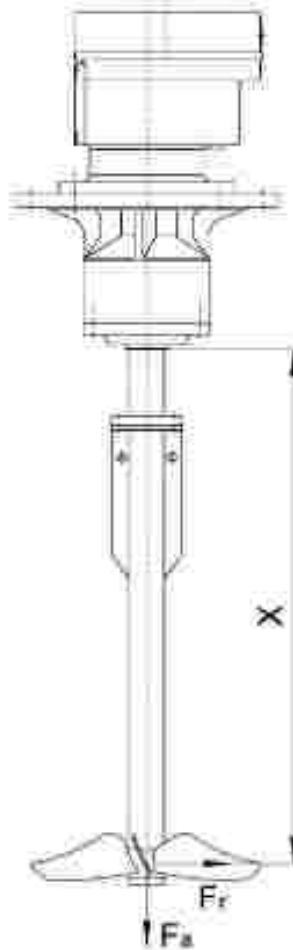

许用轴向载荷 F_{a0} , 根据不同的使用系数 f_n 和不同的额定轴承使用寿命 L_{10h} 提供

Permitted axial loads F_{a0} , Provided according to various service factor f_n and nominal bearing service life L_{10h}

		$f_{Am} = 1.5 / L_{10h} = 10000$ h							
型号 Size		n_2 (r/min)							
		<16	16-25	26-40	41-60	61-100	101-160	161-250	251-400
RM68	F_{a0} (N)	19000	18900	15300	11900	9210	7470	5870	5050
RM78	F_{a0} (N)	22000	22000	19400	15100	11400	9220	7200	6710
RM88	F_{a0} (N)	30000	30000	23600	18000	14300	11000	8940	8030
RM98	F_{a0} (N)	40000	36100	27300	20300	15900	12600	9640	7810
RM108	F_{a0} (N)	48000	41000	30300	23000	18000	13100	9550	9030
RM138	F_{a0} (N)	70000	70000	70000	57600	46900	44000	35600	32400
RM148	F_{a0} (N)	70000	70000	69700	58400	45600	38000	32800	30800
RM168	F_{a0} (N)	70000	70000	70000	60300	45300	36900	—	—

		$f_{Am} = 2.0 / L_{10h} = 25000$ h							
型号 Size		n_2 (r/min)							
		<16	16-25	26-40	41-60	61-100	101-160	161-250	251-400
RM68	F_{a0} (N)	15800	12000	9580	7330	5580	4460	3460	2930
RM78	F_{a0} (N)	20000	15400	11900	9070	6670	5280	4010	3700
RM88	F_{a0} (N)	24600	19200	14300	10600	8190	6100	5480	4860
RM98	F_{a0} (N)	28400	22000	16200	11600	8850	6840	5830	4760
RM108	F_{a0} (N)	32300	24800	17800	13000	9780	8170	5950	5620
RM138	F_{a0} (N)	70000	59900	48000	37900	33800	31700	25600	23300
RM148	F_{a0} (N)	70000	60600	45900	39900	33500	27900	24100	22600
RM168	F_{a0} (N)	70000	63500	51600	37800	26800	23600	—	—

润滑油量表
Lubrication table

规格 Size	润滑油量 (升) Fill quantity in liters					
	M1 ¹⁾	M2 ¹⁾	M3	M4	M5	M6
R18	0.4	0.5	0.6	0.6	0.7	0.7
R28	0.8	0.9	0.9	1	1	1
R38	0.8/1.2	1.2	1.1	1.2	1.1	1.1
R48	1.3/1.6	1.7	1.6	1.9	1.5	1.5
R58	1.6/2.2	2.2	2.1	2.3	1.9	1.9
R68	2/2.5	2.9/3.1	2.8	3.1	2.6	2.6
R78	2.4/3.4	3.5	3.3	3.5	3.2	3.2
R88	5.1/7.7	7.6	6.4	7.5	6.8	6.8
R98	8.8/11.9	12.8	11.2	13.1	10.4	10.4
R108	12.8/16.3	20	17.6	20	17.2	17.2
R138	20/25.5	30.4	25.6	29.6	24	24
R148	31.2/45.7	53.6	38.4	46.4	32.8	32.8
R168	60/66.5	91	78	88	70	68

注: R128, R178, R188 润滑油量请咨询 AOKMAN 公司。 Note: R128, R178, R188 quantity please consult us.

规格 Size	润滑油量 (升) Fill quantity in liters					
	M1 ¹⁾	M2 ¹⁾	M3	M4	M5	M6
RF18	0.4	0.5	0.6	0.6	0.7	0.7
RF28	0.8	0.9	0.9	1	1	1
RF38	0.8/1.2	1.2	1.1	1.2	1.1	1.1
RF48	1.3/1.6	1.7	1.6	1.9	1.5	1.5
RF58	1.6/2.2	2.2	2.1	2.3	1.9	1.9
RF68	2/2.5	2.9/3.2	2.8	3.1	2.6	2.6
RF78	2.4/3	3.5	3.3	3.5	3.2	3.2
RF88	5.1/7.8	7.6	6.4	7.5	6.8	6.8
RF98	8.8/11.9	12.8	11.2	13.1	10.4	10.4
RF108	12.8/17.3	20	17.6	20	17.2	17.2
RF138	20/25.5	30.4	25.6	29.6	24	24
RF148	31.2/45.7	53.6	38.4	46.4	32.8	32.8
RF168	59/66.5	91	78	88	69	71

规格 Size	润滑油量 (升) Fill quantity in liters					
	M1	M2	M3	M4	M5	M6
RX38 RXF38	0.5/0.45	0.8	1.1/0.9	1.1/0.9	0.7/0.6	0.7/0.6
RX58 RXF58	0.7/0.6	0.8	1.3/1.1	1.3/1.1	0.9/0.7	0.8/0.7
RX68 RXF68	0.8/0.7	0.8	1.7/1.5	1.8/1.7	1.1/1	1.1/1
RX78 RXF78	1.1/0.9	1.5	2.6/2.4	2.7/2.5	1.6	1.6
RX88 RXF88	1.7/1.6	2.5	4.8/4.9	4.8/4.7	2.9	2.9
RX98 RXF98	2.1	3.4/3.6	9.3/9.0	8.8	4.8	4.8
RX108 RXF108	3.9/3.1	5.8/5.9	11.6/11.2	11.9/11	7.7/7.2	7.7/7.2
RX128 RXF128	5.6/5.9	11.6/11.2	21.9/20.5	22.7/22.2	9.7/9.2	9.7/9.2
RX158 RXF158	11.6/11.2	21.9/20.5	31.3/30.5	32.7/32.2	13.2/12.7	13.2/12.7

注: 1) 表示减速机为组合型时连接轴处加油量为大值。

Notes: 1) The large gear unit of multi-stage gear units must be filled with the larger oil volume.

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
0.18kW					
0.16	9262	8458	1.33	R 148 R78 4 RF148 R78 4	
0.18	8192	7424	1.51		
0.22	7078	6456	1.74		
0.28	6205	5665	1.99		
0.39	5263	4865	2.34		
0.52	4779	4363	2.98		
0.77	4137	3777	2.98		
0.92	3667	3348	3.38		
0.16	9822	8784	0.78	R 138 R78 4 RF138 R78 4	
0.19	8115	7408	0.93		
0.22	7024	6412	1.08		
0.24	6374	5618	1.19		
0.28	5479	5002	1.38		
0.30	5265	4710	1.44		
0.32	4780	4364	1.58		
0.35	4482	4019	1.68		
0.36	4245	3678	1.78		
0.40	3928	3514	1.93		
0.42	3731	3338	2.03		
0.47	3274	2929	2.32		
0.35	4481	4009	0.91	R 108 R78 4 RF108 R78 4	
0.42	3737	3343	1.09		
0.43	3416	3056	1.18		
0.46	3391	3034	1.29		
0.52	2965	2653	1.37		
0.61	2548	2280	1.60		
0.67	2310	2087	1.76		
0.70	2178	1986	1.87		
0.76	2042	1828	1.99		
0.86	1802	1612	2.26		
1	1653	1389	2.63		
1.1	1376	1231	2.96		
0.51	2982	2722	0.98	R 98 R58 4 RF98 R58 4	
0.52	2982	2668	0.98		
0.60	2563	2311	1.10		
0.62	2510	2246	1.19		
0.67	2323	2079	1.22		
0.69	2253	2016	1.26		
0.80	1937	1733	1.47		
0.86	1814	1623	1.57		
0.97	1603	1434	1.77		
1.2	1349	1207	2.11		
1.3	1212	1084	2.35		
1.5	1044	934	2.72		
1.8	991	878	2.90		
1.8	845	756	3.07		
0.80	1942	1737	0.75	R 68 R58 4 RF68 R58 4	
0.80	1936	1732	0.76		
0.91	1703	1524	0.86		
0.93	1664	1489	0.88		
1.00	1559	1395	0.94		
1	1489	1341	1.00		
1.1	1377	1232	1.06		
1.2	1280	1145	1.15		
1.2	1251	1142	1.17		
1.3	1159	1037	1.27		
1.5	1041	931	1.41		
1.8	987	883	1.49		
1.7	896	802	1.84		
1.8	865	774	1.70		
0.18kW					
1.0	859	858	0.81	R 78 R38 4 RF78 R38 4	
1.7	913	817	0.85		
1.8	846	757	0.92		
1.9	815	729	0.95		
2.1	750	671	1.03		
2.1	727	650	1.07		
2.4	638	571	1.22		
2.5	611	547	1.27		
2.9	533	477	1.46	R 68 R38 4 RF68 R38 4	
3.3	476	426	1.63		
3.8	407	364	1.91		
4.5	347	310	2.24		
2.4	642	574	0.88		
2.4	638	571	0.89		
2.8	553	496	1.03		
2.9	543	486	1.04		
3.2	490	438	1.16	R 58 R38 4 RF58 R38 4	
3.6	438	384	1.30		
4	385	344	1.48		
4.8	322	288	1.77		
5.5	283	253	2.01		
3	525	471	0.81		
3.2	493	441	0.86		
3.4	458	410	0.93		
3.8	409	359	1.04	R 48 R38 4 RF48 R38 4	
3.9	399	357	1.07		
4.3	370	324	1.16		
4.4	357	319	1.19		
4.6	331	290	1.29		
5.1	305	273	1.40		
5.3	299	262	1.42		
5.8	282	247	1.51		
5.8	268	241	1.58	R 38 R38 4 RF38 R38 4	
6.3	251	220	1.70		
6.5	240	215	1.78		
7.4	214	188	1.98		
7.7	201	180	2.12		
8.5	180	161	2.37		
8.7	181	159	2.36		
4.8	343	301	0.83	R 48 R38 4 RF48 R38 4	
5.5	281	255	0.97		
6.1	260	228	1.08		
7.1	222	195	1.28		
6.2	253	226	0.75		
6.9	228	202	0.84		
7	222	199	0.85		
7.5	212	186	0.88		
7.9	198	177	0.95	R 38 R18 4 RF38 R18 4	
8.5	187	164	1.01		
8.8	180	158	1.05		
9.3	168	150	1.13		
9.9	158	141	0.78		
10	159	139	0.77		
11	139	124	0.88		
12	135	118	0.91		
13	123	110	1.00	R 28 R18 4 RF28 R18 4	
13	119	104	1.03		
15	105	94	1.17		
15	103	90	1.19		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机型号 Type Type	极数 Pole P
0.18kW					
4.4	371	195.24	2.09	R 78 RF78	6
5.1	317	166.59	2.45		6
5.8	277	145.67	2.81		6
6.1	263	138.39	2.96		6
7	221	121.42	3.37		6
7.1	227	155.24	3.43	R 78 RF78	4
8.3	184	166.59	4.01		4
9.5	169	145.67	4.60		4
10	161	138.39	4.83		4
10.1	161	138.39	4.83		4
4.3	380	199.61	1.56	R 68 RF68	6
4.6	350	184.07	1.71		6
5.4	301	158.14	1.99		6
6.2	262	137.57	2.29		6
6.6	246	126.07	2.45		6
7.5	217	113.04	2.76		6
8	201	105.83	2.99		6
8.9	182	95.91	3.30		6
9.9	164	86.11	3.66		6
11	141	74.17	4.26		6
12	133	68.75	4.51		6
7	232	199.61	2.59	R 68 RF68	4
7.8	214	184.07	2.80		4
8.8	184	158.14	3.26		4
10	160	137.57	3.75		4
11	150	126.07	4.00		4
12	132	113.04	4.55	R 58 RF58	6
13	123	105.83	4.88		6
4.5	355	166.59	1.27		6
4.9	327	152.17	1.38		6
5.7	281	147.92	1.60		6
6.6	245	126.77	1.84		6
7	229	120.83	1.97		6
2.4	217	188.89	2.07	R 58 RF58	4
2.1	200	172.17	2.25		4
9.4	172	147.92	2.62		4
11	150	126.77	3.00		4
12	140	120.83	3.21		4
13	124	105.83	3.63		4
14	115	98.89	3.91		4
15	104	89.71	4.33		4
7.0	206	176.88	1.46	R 48 RF48	4
8.5	188	162.94	1.59		4
9.9	163	139.99	1.84		4
11	142	121.87	2.11		4
12	133	114.17	2.26		4
14	117	100.86	2.56		4
15	109	93.66	2.75		4
16	99	84.90	3.03		4
18	89	76.23	3.37		4
6.9	235	123.66	0.85	R 38 RF38	6
8.1	200	105.28	1.00		6
9.4	173	90.77	1.16		6
10	161	84.61	1.24		6
10	157	134.82	1.27	R 38 RF38	4
11	144	123.66	1.39		4
13	122	105.28	1.64		4
15	106	90.77	1.89		4
16	98	84.61	2.04		4
18	86	73.86	2.33		4
20	81	69.33	2.47		4
23	71	61.16	2.82		4
25	65	55.76	3.08		4
28	58	48.08	3.57		4

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P		
0.18kW							
229	7	6.07	6.14	RX 68 RXF68	4		
268	6	5.18	12.50				
307	5	4.53	16.40				
323	5	4.3	16.00				
369	5	3.77	17.40				
434	4	3.2	25.00				
481	4	2.89	29.50				
547	3	2.54	39.33				
579	3	2.4	41.00	RX 58 RXF58	4		
681	2	2.04	67.00				
155	11	5.5	3.55				
168	10	5.07	3.50				
195	8	4.35	7.56				
224	8	3.79	8.63				
253	7	5.5	5.57				
274	6	5.07	6.00				
320	5	4.35	13.50	RX 58 RXF58	4		
367	5	3.79	13.80				
392	4	3.55	17.25				
443	4	3.14	16.26				
478	4	2.91	16.75				
527	3	2.64	23.00				
586	3	2.37	23.00				
681	2	2.04	34.50				
724	2	1.92	34.50	RX 38 RXF38	4		
842	2	1.65	34.50				
426	4	3.26	5.50				
527	3	2.64	4.33				
0.25kW							
0.14	14821	9742	0.88			R 148 R78 RF148 R78	4
0.16	12863	8459	1.01				
0.19	11295	7424	1.15				
0.22	9822	6458	1.32				
0.25	8619	5685	1.51				
0.29	7310	4895	1.76				
0.32	6638	4363	1.96				
0.37	5748	3777	2.28				
0.42	5094	3348	2.55				
0.50	4237	2785	3.07				
0.24	8853	5810	0.90	R 138 R78 RF138 R78	4		
0.28	7610	5002	1.05				
0.30	7312	4710	1.08				
0.32	6639	4364	1.21				
0.35	6239	4019	1.38				
0.36	5960	3878	1.38				
0.40	5455	3514	1.47				
0.42	5182	3338	1.54				
0.47	4547	2929	1.76				
0.52	4126	2658	1.84				
0.58	3744	2412	2.14	R 108 R78 RF108 R78	4		
0.67	3218	2073	2.49				
0.75	2824	1856	2.83				
0.89	2189	1397	3.69				
1.1	1903	1229	4.20				
0.46	4686	3025	0.92			R 108 R78 RF108 R78	4
0.48	4710	3034	0.91				
0.70	3025	1988	1.42				
0.76	2838	1828	1.52				
0.88	2503	1612	1.72				
1	2156	1389	1.99				
1.1	1911	1231	2.25				
1.5	1465	944	2.94				
1.7	1279	824	3.38				
0.25kW							
0.88	3136	2016	0.96	R 98 R58 RF98 R58	4		
0.78	2830	1823	1.06				
0.80	2690	1733	1.12				
0.88	2520	1623	1.19				
0.88	2488	1583	1.22				
1.00	2167	1398	1.38				
1.1	1941	1250	1.55				
1.3	1658	1068	1.81				
1.5	1455	937	2.06				
1.7	1282	813	2.38				
1.9	1130	726	2.65	R 98 R58 RF98 R58	4		
2.2	992	626	3.02				
1.2	1778	1145	0.87				
1.2	1737	1142	0.89				
1.3	1610	1037	0.96				
1.5	1445	931	1.07				
1.6	1371	883	1.13				
1.7	1245	802	1.24				
1.8	1202	774	1.29				
2	1060	663	1.46				
2.3	930	599	1.67	R 88 R58 RF88 R58	4		
2.7	800	515	1.94				
3.1	711	449	2.18				
3.3	613	382	2.73				
2.4	888	571	0.93				
2.5	849	547	0.97				
2.9	741	477	1.11				
3.3	661	426	1.24				
3.5	565	364	1.45				
4.5	481	310	1.70				
5.5	387	249	2.12	R 78 R38 RF78 R38	4		
6.3	347	219	2.36				
3.6	688	381	0.99				
3.9	569	359	1.05				
4	534	344	1.12				
4.5	491	310	1.22				
4.8	447	289	1.34				
5.3	418	264	1.44				
5.5	393	253	1.53				
5.9	372	235	1.61				
5.9	363	234	1.65	R 68 R38 RF68 R38	4		
6.9	316	201	1.89				
7.2	301	194	1.99				
7.7	287	181	2.09				
8.1	267	172	2.25				
9.1	238	152	2.54				
4.3	513	324	0.88				
4.4	495	319	0.91				
4.8	459	290	0.98				
5.1	424	273	1.06				
5.3	415	262	1.08				
5.6	391	247	1.15	R 58 R38 RF58 R38	4		
5.8	374	241	1.20				
6.3	349	220	1.29				
6.5	334	215	1.35				
7.7	279	180	1.61				
8.6	250	161	1.80				
10	211	136	2.13				
6.1	361	226	0.83				
7.1	309	195	0.87				
7.6	288	182	0.94				
8	244	154	1.23				

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
0.25kW					
8.8	250	158	0.80	R 38 R18 RF38 R18	4
9.3	233	150	0.88		
10	220	139	0.91		
11	202	130	0.99		
11	193	124	1.04		
13	171	110	1.17		
13	166	105	1.20		
15	149	94	1.34		
15	143	90	1.40		
2.2	1008	289.74	2.98	R 98 RF98	8
2.5	890	255.71	3.37		
2.7	839	241.25	3.58		
3	752	216.28	3.99		
2.6	658	246.54	1.81	R 88 RF88	8
3	759	216.54	2.08		
3.1	718	208.71	2.18		
3.5	638	181.77	2.45		
3.9	580	168.59	1.41	R 78 RF78	8
4.4	507	145.87	1.62		
4.7	481	138.39	1.70		
5.3	422	121.42	1.94		
4.4	515	195.24	1.89	R 78 RF78	6
5.1	440	168.59	1.86		
5.8	385	145.87	2.13		
7.1	315	195.24	2.60		
8.9	269	168.59	3.05	R 78 RF78	4
9.5	236	145.87	3.49		
10	223	138.39	3.68		
11	196	121.42	4.18		
4.1	550	158.14	1.09	R 68 RF68	8
4.7	479	137.07	1.25		
5	449	128.97	1.34		
5.7	396	113.94	1.52		
4.3	528	189.81	1.14	R 68 RF68	6
4.8	488	184.07	1.23		
5.4	417	158.14	1.44		
6.2	363	137.87	1.65		
6.6	340	128.97	1.76		
7.5	301	113.94	1.99		
8	279	105.83	2.15		
7	385	189.81	1.88		
7.6	397	184.07	2.02	R 68 RF68	4
8.8	265	158.14	2.35		
10	229	137.87	2.70		
11	208	128.97	2.88		
12	184	113.94	3.26		
13	171	105.83	3.51		
14	155	95.91	3.87		
16	139	86.11	4.32		
4.5	493	186.89	0.91	R 58 RF58	6
4.9	455	172.17	0.99		
5.7	391	147.92	1.15		
6.6	340	128.77	1.32		
7	318	120.53	1.42		
8	281	106.58	1.60		
8.6	261	98.99	1.72		
7.4	302	186.89	1.49	R 58 RF58	4
8.1	278	172.17	1.62		
9.4	238	147.92	1.88		
11	206	128.77	2.16		
12	195	120.63	2.31		
13	172	106.58	2.62		
14	160	98.99	2.81		
15	145	88.71	3.10		
17	130	80.55	3.46	R 48 RF48	4
20	112	68.23	4.02		
7.9	286	178.88	1.05		
8.5	280	162.94	1.14		
9.9	226	139.38	1.33		
11	197	121.87	1.52		
12	184	114.17	1.63		
14	163	100.88	1.84		
15	151	93.68	1.99	R 38 RF38	4
16	137	84.90	2.19		
18	123	76.23	2.44		
20	111	68.54	2.70		
22	104	64.21	2.88		
25	92	56.73	3.26		
26	85	52.69	3.53		
29	77	47.75	3.90		
10	216	134.02	0.82	R 38 RF38	4
11	200	123.68	1.00		
13	170	105.28	1.18		
15	147	90.77	1.36		
16	137	84.61	1.48		
19	119	73.86	1.86		
20	112	69.33	1.79		
23	99	61.18	2.02		
25	90	55.78	2.22	R 28 RF28	4
29	78	48.08	2.56		
31	72	44.81	2.78		
35	63	39.17	3.17		
38	59	36.72	3.39		
43	52	32.40	3.85		
16	137	84.78	0.95		
19	120	74.11	1.08		
20	112	69.47	1.16	R 28 RF28	4
23	99	61.30	1.31		
25	90	55.87	1.44		
29	78	48.17	1.87		
31	72	44.90	1.81		
35	63	39.25	2.06		
38	59	36.79	2.20		
43	52	32.47	2.50		
46	46	28.78	2.83	R 18 RF18	4
57	40	24.47	3.25		
49	47	28.37	2.77		
59	43	28.09	3.02		
62	37	23.32	3.51		
72	33	19.35	4.06		
77	30	18.08	4.30		
89	28	15.63	5.00		
103	22	13.28	5.81	R 18 RF18	4
117	20	11.88	6.45		
137	17	10.13	7.18		
148	16	9.41	7.83		
170	13	8.16	8.92		
183	11	7.63	9.62		
211	11	6.59	9.64		
248	9	5.60	11.00		
278	8	5.00	11.68	R 18 RF18	4
328	7	4.27	12.43		
348	7	4.00	12.14		
412	6	3.37	13.17		

输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数	输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数	
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole	
r/min	Nm	i	f _s	Type	P	r/min	Nm	i	f _s	Type	P	
0.25kW						0.37kW						
26	85	52.57	1.08	R 18 RF18	4	0.19	18716	7424	0.78	R 148 R78 RF148 R78	4	
28	80	49.28	1.06		0.22	14537	6488	0.89				
32	70	43.49	1.21		0.25	12788	5885	1.02				
34	68	40.49	1.31		0.29	10819	4805	1.20				
39	57	35.40	1.48		0.32	9824	4363	1.32				
42	54	33.18	1.57		0.37	8504	3777	1.53				
47	47	29.28	1.81		0.42	7539	3348	1.72				
54	42	25.90	2.02		0.50	6271	2785	2.07				
63	38	22.06	2.38		0.32	9826	4364	0.81	R 138 R78 RF138 R78	4		
69	38	23.13	2.24		0.38	9234	4019	0.87				
66	35	21.22	2.43		0.38	8732	3878	0.92				
77	30	18.06	2.83		0.40	8074	3514	0.98				
89	26	15.57	3.27		0.42	7609	3338	1.04				
96	24	14.52	3.54		0.47	6730	2929	1.19				
110	21	12.09	4.05		0.52	6107	2688	1.31				
117	20	11.89	4.25		0.56	5707	2484	1.40				
132	17	10.50	4.76	0.58	5542	2412	1.44					
149	15	9.31	5.13	0.60	5164	2243	1.55					
176	13	7.81	5.54	0.67	4763	2073	1.68					
184	12	7.55	4.67	0.75	4179	1856	1.81					
197	12	7.04	4.58	0.99	3210	1397	2.49					
226	10	6.15	5.40	1.1	2817	1226	2.84					
241	9	5.76	5.89	1.3	2504	1090	3.19					
273	8	5.09	6.38	1.5	2185	951	3.68					
308	7	4.51	6.88	0.67	4748	2067	0.91	R 108 R78 RF108 R78	4			
383	6	3.83	7.50	0.70	4476	1988	0.96					
149	17	8.07	2.53	0.78	4200	1828	1.02					
164	14	5.18	5.38	0.82	3890	1693	1.11					
188	12	4.53	6.83	0.86	3704	1612	1.16					
198	12	4.0	6.67	0.89	3587	1561	1.20					
229	10	6.07	4.30	1	3191	1389	1.35					
268	9	5.18	6.33	1.1	2828	1231	1.52					
307	8	4.53	10.25	1.4	2360	1027	1.82					
323	7	4.3	11.43	1.5	2189	944	1.98					
369	6	3.77	14.50	1.5	2066	899	2.08					
434	5	3.2	20.00	1.7	1893	824	2.27					
481	5	2.89	21.20	0.67	3295	1434	0.81	R 96 R58 RF96 R58	4			
547	4	2.54	29.30	1.00	3207	1396	0.84					
579	4	2.4	30.75	1.1	2872	1250	1.04					
681	3	2.04	44.67	1.2	2773	1207	1.08					
155	15	5.5	2.60	1.3	2491	1084	1.20					
168	14	5.07	2.57	1.3	2454	1068	1.22					
195	12	4.35	5.67	1.5	2153	937	1.39					
224	10	3.79	6.90	1.7	1888	813	1.61					
283	8	5.6	4.33	1.8	1673	726	1.79					
274	9	5.07	4.05	2.2	1466	526	2.04					
320	7	4.35	9.71	3.2	988	430	3.04					
387	6	3.79	11.50	2.7	882	376	3.40					
392	6	3.55	11.50	4.1	773	338	3.89					
443	5	3.14	13.00	1.7	1843	802	0.84		R 86 R58 RF86 R58	4		
478	5	2.91	13.40	1.8	1776	774	0.87					
527	4	2.64	17.25	1.8	1732	754	0.89					
586	4	2.37	17.25	2	1568	683	0.99					
681	3	2.04	23.00	2.1	1491	649	1.04					
784	3	1.92	23.00	2.3	1376	589	1.13					
842	3	1.65	23.00	2.8	1261	538	1.23					
370	6	3.76	2.33	2.7	1183	519	1.31					
426	5	2.26	2.80	2.8	1107	472	1.40					
468	5	2.05	2.80	3.1	1053	448	1.47					
527	4	2.64	3.25	3.5	938	400	1.65					
621	4	2.24	3.75	3.8	846	361	1.83					
885	3	2	4.33	5.3	614	262	2.52					
813	3	1.71	5.00									
889	3	1.6	5.33									

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
0.37kW						0.37kW					
3.3	979	426	0.84	R 78 R38 RF78 R38	4	16	208	86.11	3.91	R 68 RF68	4
3.8	836	364	0.98			19	177	74.17	3.39		
4.3	751	327	1.09			20	167	69.73	3.59		
4.5	712	310	1.15			23	146	61.28	4.11		
5	649	277	1.28			24	136	56.89	4.41		
5.6	572	249	1.43			5.9	483	126.77	0.93	R 58 RF58	6
5.9	553	236	1.46			7.3	453	120.53	0.99		
6.3	518	221	1.58			8.3	400	106.58	1.13		
6.3	513	219	1.60			8.9	371	98.89	1.21		
7.5	425	185	1.93	R 68 R38 RF68 R38	4	7.4	447	108.89	1.01	R 58 RF58	4
7.8	417	178	1.97			8.1	411	172.17	1.09		
8.4	389	166	2.11			9.4	353	147.32	1.27		
9.8	333	142	2.46			11	308	128.77	1.46		
4.8	662	268	0.91			12	288	120.63	1.56		
5.3	619	264	0.97			13	265	106.58	1.78		
5.5	581	253	1.03			14	237	88.89	1.90		
5.9	551	235	1.08			15	214	88.71	2.10		
5.9	538	234	1.12			17	192	80.55	2.34		
6.9	471	201	1.27	R 98 RF98	8	20	165	69.23	2.70	R 48 RF48	4
7.2	446	184	1.36			21	155	64.85	2.90		
2.6	1268	255.71	2.37			24	137	57.29	3.28		
2.8	1198	241.25	2.51			26	127	53.22	3.54		
3.1	1072	216.28	2.80			28	115	48.23	3.91		
3.6	923	186.30	3.25			9.9	334	139.89	0.90		
3.1	1087	269.74	2.78			11	291	121.87	1.03		
3.5	960	255.71	3.13			12	273	114.17	1.10		
3.7	905	241.25	3.31	R 88 RF88	6	14	241	100.86	1.24	R 18 RF18	4
4.1	812	216.28	3.89			15	224	93.68	1.34		
3.1	1073	216.54	1.44			16	203	84.90	1.48		
3.3	1020	205.71	1.52			18	182	78.23	1.65		
3.7	901	181.77	1.72			20	164	68.54	1.83		
3.6	925	146.54	1.68			22	153	64.21	1.96		
4.1	813	116.54	1.51			25	136	56.73	2.21		
4.5	772	105.71	2.01			26	126	52.59	2.38		
4.9	682	181.77	2.27	R 78 RF78	8	28	114	47.75	2.63	RX 68 RXF68	4
5.7	583	155.34	2.68			30	102	42.87	2.94		
6.2	534	142.41	2.90			36	88	36.93	3.41		
4.6	722	145.67	1.14			40	83	34.73	3.61		
4.8	686	138.39	1.20			47	71	28.88	4.23		
5.5	602	121.42	1.38			41	62	33.79	2.93		
5.3	625	166.59	1.31			45	76	31.12	2.89		
6.1	547	145.67	1.50			52	65	26.74	4.62		
6.4	510	136.39	1.56	R 78 RF78	8	60	57	23.28	5.26		
7.1	466	195.24	1.78			64	53	21.81	5.68		
8.3	399	166.59	2.06			15	217	90.77	0.92	R 38 RF38	4
9.5	348	145.67	2.36			16	202	84.61	0.99		
10	331	138.39	2.48			19	177	75.96	1.13		
11	290	121.42	2.83			20	166	69.33	1.20		
13	248	102.99	3.33			23	146	61.18	1.37		
15	222	92.97	3.89			25	133	55.78	1.50		
5.6	593	158.14	1.01			28	115	48.08	1.74		
6.4	517	137.67	1.16			31	107	44.81	1.87		
6.9	484	128.97	1.24	R 68 RF68	6	35	94	39.17	2.13	RX 68 RXF68	4
7.8	438	113.94	1.40			36	88	36.72	2.27		
7	477	199.81	1.26			43	77	32.40	2.80		
7.6	440	184.07	1.38			48	68	28.73	2.90		
8.8	378	168.14	1.58			57	58	24.42	3.45		
10	329	137.67	1.82			59	59	28.32	2.90		
11	308	128.97	1.95			53	64	26.03	2.89		
12	272	113.94	2.21			62	54	22.27	3.70		
13	253	105.83	2.37	R 88 RF88	4	72	47	19.31	4.26	RX 68 RXF68	4
14	229	95.91	2.62			77	44	18.05	4.55		
						80	38	15.60	5.28		
						105	32	13.25	5.94		
						117	29	11.83	6.31		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	级 数 Pole P	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	级 数 Pole P
0.37kW						0.37kW					
23	148	61.30	0.89	R 28 RF28	4	253	14	5.5	2.79	RX 58 RXF58	4
25	133	55.87	0.88			274	13	5.07	2.77		
28	115	48.17	1.13			320	11	4.35	6.18		
31	107	44.90	1.21			387	9	3.79	7.67		
35	94	38.25	1.38			392	8	3.55	7.67		
38	86	36.79	1.48			443	8	3.14	6.13		
43	78	32.47	1.67			478	7	2.91	9.57		
48	69	28.78	1.88			527	7	2.84	8.88		
57	58	24.47	2.24			588	6	2.37	11.50		
59	59	28.37	1.88			681	5	2.04	13.60		
63	64	26.09	2.03			724	5	1.92	13.80		
62	54	22.32	2.41			842	4	1.65	17.25		
72	47	19.35	2.77			RX 38 RXF38	4	408	8	3.26	1.75
77	44	18.08	2.95					458	8	3.05	1.75
88	38	15.63	3.42					527	7	2.64	1.68
105	32	13.28	4.06					621	6	2.24	2.50
38	85	35.40	1.00	695	5			2	2.60		
42	79	33.18	1.08	813	4			1.71	3.75		
47	70	29.28	1.21	868	4			1.6	4.00		
54	62	25.96	1.37	0.55kW							
63	53	22.66	1.65	0.23	20082	6000	0.90	R 168 R98 RF168 R98	4		
60	56	23.13	1.52	0.25	18456	5514	0.98				
66	52	21.33	1.83	0.29	15989	4760	1.13				
77	44	18.06	1.93	0.34	13813	4127	1.30				
89	38	15.57	2.24	0.25	16083	4805	0.81	R 148 R78 RF148 R78	4		
96	35	14.52	2.43	0.32	14503	4363	0.89				
110	31	12.69	2.74	0.37	12642	3777	1.03				
117	29	11.85	2.93	0.42	11206	3348	1.16				
132	26	10.50	3.12	0.50	9322	2785	1.39				
149	23	9.31	3.35	0.54	8726	2655	1.49				
176	19	7.91	3.79	0.63	7551	2211	1.72				
184	18	7.55	3.11	0.71	5853	1951	1.95				
197	17	7.04	3.24	0.82	5823	1705	2.23				
226	15	6.15	3.60	0.90	5248	1596	2.48				
241	14	5.78	3.29	1	4539	1329	2.86				
273	12	4.69	4.25	1.2	3903	1166	3.33				
308	11	4.51	4.35	0.52	9078	2698	0.88	R 138 R78 RF138 R78	4		
363	9	3.83	5.00	0.58	8484	2484	0.94				
171	20	5.18	3.75	0.58	8238	2412	0.97				
195	18	4.53	4.58	0.62	7661	2243	1.04				
206	17	4.3	4.71	0.67	7080	2073	1.13				
235	15	3.77	5.80	0.75	6212	1856	1.29				
228	15	6.07	2.87	0.87	5349	1598	1.50				
268	13	5.18	5.77	0.99	4771	1397	1.68				
307	11	4.53	7.45	1.1	4187	1226	1.91				
323	11	4.3	7.27	1.3	3723	1090	2.15				
389	8	3.77	9.67	1.5	3248	991	2.46				
434	8	3.2	12.50	1.7	2836	831	2.82				
481	7	2.89	15.14	1	4744	1369	0.91	R 108 R78 RF108 R78	4		
547	6	2.54	19.67	1.1	4204	1201	1.02				
579	6	2.4	20.50	1.3	3753	1059	1.15				
681	5	2.04	26.60	1.4	3508	1027	1.23				
203	17	4.35	4.00	1.5	3224	944	1.33				
234	15	3.79	4.60	1.5	3073	899	1.40				
249	14	3.65	4.93	1.7	2814	824	1.53				
				1.7	2722	797	1.58				
				2	2363	669	1.83				
				2.3	2090	612	2.06				

输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数	输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _s	Type	P	r/min	Nm	i	f _s	Type	P
0.55kW						0.55kW					
1.5	3200	937	0.94	R 98 R58 RF98 R58	4	8.8	563	158.14	1.07	R 68 RF68	4
1.7	2777	813	1.08			10	489	137.67	1.23		
1.9	2486	728	1.21			11	458	128.97	1.31		
2.2	2182	626	1.37			12	405	113.94	1.48		
2.5	1913	549	1.57			13	378	105.83	1.60		
2.9	1653	484	1.81			14	341	95.91	1.76		
3.2	1469	430	2.04			16	306	86.11	1.98		
3.7	1310	376	2.29			18	260	74.17	2.28		
4.1	1148	338	2.61			20	248	69.75	2.42		
4.7	1011	296	2.97			23	218	61.29	2.75		
5.5	850	249	3.53	24	202	58.89	2.97				
2.7	1759	515	0.88	R 88 R58 RF88 R58	4	12	426	120.63	1.05	R 58 RF58	4
2.9	1645	472	0.94			13	379	106.38	1.19		
3.1	1585	449	0.99			14	352	98.89	1.28		
3.5	1394	400	1.11			16	319	89.71	1.41		
3.5	1350	397	1.14			17	296	80.55	1.57		
3.9	1258	361	1.23			20	246	69.23	1.83		
3.9	1202	352	1.29			21	230	64.85	1.98		
4.6	1038	304	1.49			24	203	57.29	2.22		
5	985	277	0.85			28	189	53.22	2.38		
5.6	850	249	0.96			29	171	48.23	2.63		
5.9	822	238	1.00	32	154	43.30	2.92	R 48 RF48	4		
6.3	770	221	1.08	37	132	37.30	3.41				
6.3	763	219	1.07	40	125	35.07	3.60				
7.5	638	185	1.30	46	107	30.18	4.21				
7.6	620	178	1.32	52	96	26.97	4.69				
2.6	1884	255.71	1.59	53	95	26.31	4.74				
2.8	1778	241.25	1.69	56	91	24.99	4.95				
3.1	1594	216.28	1.88	63	80	21.93	5.63				
3.1	1616	289.74	1.88	75	67	18.60	6.72				
3.5	1426	255.71	2.10	R 98 RF98	8	15	333			93.88	0.90
3.7	1346	241.25	2.23			16	302	84.90	0.99		
4.1	1206	216.28	2.49			18	271	76.23	1.11		
4.6	1029	189.74	2.92			20	243	68.54	1.23		
5.4	906	165.71	3.30			22	228	64.21	1.32		
5.6	857	161.25	3.50			25	201	56.73	1.49		
6.4	768	146.28	3.91			28	187	52.69	1.60		
3.9	1375	246.54	1.13			29	170	47.75	1.78		
4.1	1208	216.54	1.28			32	152	42.87	1.97		
4.3	1148	205.71	1.35			38	131	36.93	2.29		
4.9	1014	181.77	1.53			40	129	34.73	2.44		
5.7	887	155.34	1.79	47	106	29.88	2.83				
5.8	876	146.34	1.77	52	95	26.70	3.16	R 28 RF28	4		
6.4	769	126.54	2.02	58	84	23.59	3.57				
6.8	731	105.71	2.12	62	97	26.74	3.09				
7.6	646	81.77	2.40	60	84	25.28	3.57				
8.9	552	65.34	2.81	64	79	21.81	3.80				
9.8	506	142.41	3.06	23	217	61.18	0.92			R 38 RF38	4
11	444	124.97	3.48	25	198	55.76	1.01				
12	421	118.43	3.68	29	171	48.08	1.17				
13	388	103.65	4.21	31	159	44.81	1.26				
8.3	582	165.59	1.39	35	139	39.17	1.44				
9.5	517	145.67	1.59	38	130	36.72	1.54				
10	492	138.39	1.67	43	115	32.40	1.74				
11	431	121.42	1.90	48	102	28.73	1.99				
13	366	102.99	2.24	57	87	24.42	2.30				
15	330	92.97	2.48	62	81	22.27	2.47				
17	291	81.80	2.82	72	70	19.31	2.86				
18	274	77.24	2.99	77	65	18.65	3.08				
21	234	65.77	3.50	89	57	15.90	3.51				
				105	48	13.25	3.99				
				117	43	11.83	4.28				

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
0.75kW					
3.5	1848	397	0.84	R 88 R58 RF88 R58	4
3.9	1716	361	0.80		
3.9	1639	352	0.85		
4.6	1418	304	1.09		
4.6	1426	300	1.09		
5.3	1246	262	1.24		
5.5	1212	255	1.28		
6.2	1055	224	1.46		
2.7	2475	249.97	1.74	R 108 RF108	8
3	2268	228.87	1.90		
3.4	2002	202.20	2.15		
3.1	2141	216.26	1.40	R 98 RF98	8
3.7	1844	186.30	1.63		
4	1683	170.02	1.78		
3.6	1882	255.71	1.69	R 98 RF98	6
3.6	1785	241.25	1.66		
4.2	1600	216.26	1.86		
4.8	1403	249.74	2.14	R 98 RF98	4
5.4	1238	255.71	2.42		
5.8	1168	241.25	2.57		
6.4	1047	216.26	3.87		
7.5	902	186.30	3.93		
8.2	823	170.02	3.65		
4.2	1602	216.54	0.97	R 88 RF88	6
4.4	1522	205.71	1.02		
5	1345	181.77	1.15		
5.9	1149	155.34	1.35		
6.4	1054	142.41	1.47		
5.6	1194	246.54	1.30		
6.4	1048	216.54	1.48	R 88 RF88	4
6.8	995	205.71	1.66		
7.6	880	181.77	1.78		
8.9	762	155.34	3.06		
8.8	690	142.41	2.25		
11	605	124.97	2.58		
12	574	118.43	2.70		
13	502	103.65	3.09		
15	452	93.38	3.43		
8.3	807	166.59	1.02	R 78 RF78	4
9.6	706	145.67	1.16		
10	670	136.39	1.22		
11	588	121.42	1.39		
13	499	102.99	1.64		
15	450	92.97	1.82		
17	396	81.80	2.07		
18	374	77.24	2.19		
21	319	65.77	2.57		
25	273	58.36	3.00		
27	247	50.90	3.32		
31	217	44.78	3.78		
33	205	42.09	4.00		
11	625	128.97	0.86	R 68 RF68	4
12	552	113.94	1.09		
13	513	105.63	1.17		
14	465	95.91	1.28		
16	417	86.11	1.44		
19	369	74.17	1.67		
20	338	68.75	1.78		
23	297	61.26	2.02		
24	276	56.89	2.17		
27	250	51.56	2.40		
30	224	45.29	2.68		
13	518	106.58	0.87	R 58 RF58	4
14	478	98.09	0.94		
15	434	89.71	1.04		
17	390	80.55	1.15		
20	335	69.23	1.34		
21	314	64.88	1.43		
24	277	57.29	1.62		
25	258	53.22	1.74		
29	234	48.23	1.92		
32	210	43.30	2.14		
37	181	37.30	2.48		
40	170	35.07	2.65		
46	145	30.18	3.08		
52	131	26.97	3.44		
53	130	26.31	3.46		
56	124	24.99	3.63		
63	108	21.93	4.17		
75	92	18.60	4.89		
20	332	88.54	0.90	R 48 RF48	4
22	311	84.21	0.96		
25	275	56.73	1.08		
26	265	52.69	1.16		
29	231	47.75	1.30		
32	208	42.87	1.44		
38	179	36.93	1.68		
40	168	34.73	1.79		
47	145	29.88	2.07		
52	129	26.70	2.33		
59	114	23.59	2.63		
52	132	26.74	2.27		
60	115	23.28	2.61		
64	105	21.81	2.78		
72	95	19.27	3.11		
78	88	17.89	3.30		
86	80	16.22	3.44		
29	233	48.08	0.86	R 38 RF38	4
31	217	44.61	0.92		
35	190	39.17	1.05		
38	178	36.72	1.12		
43	157	32.40	1.27		
48	138	28.73	1.44		
57	115	24.42	1.69		
62	110	22.27	1.82		
72	96	19.31	2.08		
77	89	18.04	2.26		
89	77	15.60	2.50		
105	66	13.25	2.88		
117	59	11.83	3.10		
137	50	10.11	3.40		
147	47	9.47	3.55		
48	139	28.78	0.84	R 28 RF28	4
57	119	24.47	1.09		
62	110	22.02	1.18		
72	96	19.38	1.35		
77	89	18.08	1.45		
89	77	15.63	1.59		
105	66	13.28	1.87		
117	59	11.88	2.19		
137	50	10.13	2.44		
148	47	9.41	2.60		
170	40	8.16	2.90		
182	38	7.83	2.95		
211	33	6.59	3.21		
248	28	5.60	3.54		
278	25	5.00	3.80		

输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数	输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _s	Type	P	r/min	Nm	i	f _s	Type	P
0.75kW						1.1kW					
77	89	18.06	0.96	R 18 RF18	4	0.60	15492	2331	1.16	R 168 R98 RF168 R98	4
89	77	15.57	1.10			0.68	13784	2074	1.31		
96	72	14.52	1.18			0.75	12587	1856	1.43		
110	63	12.69	1.35			0.84	11073	1666	1.63		
117	59	11.69	1.44			0.96	9650	1452	1.87		
132	52	10.50	1.58			1.1	8540	1265	2.11		
149	46	9.31	1.67			1.2	7725	1129	2.33		
176	39	7.91	1.85			R 148 R78 RF148 R78	4	0.63	14995	2211	0.87
184	37	7.55	1.91					0.72	13232	1951	0.96
197	35	7.04	1.97					0.82	11563	1705	1.12
226	30	6.15	1.80					0.91	10417	1535	1.25
241	28	5.76	1.89					1.1	9013	1329	1.44
273	25	5.09	2.04					1.2	7750	1166	1.68
308	22	4.51	2.18					1.4	6679	1029	1.86
363	19	3.83	2.37					1.6	6029	889	2.16
201	35	4.53	2.34	1.8	5317			784	2.44		
212	33	4.3	2.42	2	4713			695	2.76		
241	29	3.77	3.00	R 138 R78 RF138 R78	4	1	9474	1397	0.84		
264	25	3.2	4.00			1	9223	1360	0.87		
268	26	5.18	2.86			1.1	8326	1228	0.96		
307	23	4.53	3.57			1.1	8315	1226	0.96		
323	22	4.3	3.64			1.3	7392	1090	1.08		
369	19	3.77	4.58			1.3	7324	1080	1.09		
434	16	3.2	6.25			1.4	6618	1020	1.14		
481	15	2.89	7.07			1.5	6450	951	1.24		
547	13	2.54	9.08			1.6	5893	869	1.38		
579	12	2.4	10.25			1.7	5636	831	1.42		
681	10	2.04	13.40	1.8	5168	762	1.55				
747	9	1.86	14.00	2	4639	684	1.73				
863	8	1.81	14.25	2.2	4266	629	1.88				
240	29	3.79	2.38	R 108 R78 RF108 R78	4	2.4	4035	595	1.98		
256	27	3.55	2.55			2.5	3603	564	2.05		
290	24	3.14	2.71			2.5	3796	560	2.11		
313	22	2.91	3.05			2.7	3578	517	2.34		
345	20	2.64	3.45			2.9	3323	480	2.41		
320	22	4.35	3.08	R 98 R58 RF98 R58	4	2	4673	689	0.92		
367	19	3.79	3.83			2.3	4151	612	1.04		
382	18	3.55	3.83			2.3	4144	611	1.04		
443	16	3.14	4.06			2.6	3678	542	1.17		
478	15	2.91	4.47			2.9	3323	490	1.29		
527	13	2.84	5.31			3	3246	469	1.32		
588	12	2.57	5.75			3.4	2814	415	1.53		
681	10	2.04	6.90			3.7	2609	377	1.65		
724	10	1.92	6.90			3.8	2503	369	1.72		
842	8	1.85	8.63			4.3	2242	324	1.92		
939	7	1.48	9.71			4.9	1972	285	2.16		
1089	7	1.3	9.00			4.9	1826	264	2.23		
456	15	3.05	0.83			5.5	1772	254	2.43		
527	13	2.64	1.00			5.5	1716	253	2.51		
621	11	2.24	1.36			3.3	2916	430	1.03		
695	10	2	1.30	3.7	2602	379	1.15				
813	9	1.71	1.67	4.2	2279	336	1.32				
869	8	1.6	2.00	4.7	2007	298	1.49				
				5.6	1666	270	1.61				
				6.2	1689	249	1.78				
				6.7	1619	234	1.85				
				6.7	1571	227	1.91				
				6.7	1440	209	2.07				
				5.3	1813	282	0.85				
				5.5	1795	255	0.88				
				6	1606	232	0.97				
				6.8	1550	224	1.00				
				6.7	1411	208	1.10				
				7.2	1349	195	1.15				
										R 88 R58 RF88 R58	4
											4

R

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	级 数 Pole p
1.1kW					
2.7	3630	249.97	1.16	R 108 RF108	8
3	3320	229.97	1.29		8
3.4	2936	202.20	1.46		8
4	2491	171.93	1.73		8
3.6	2775	255.71	1.08	R 96 RF96	6
3.8	2616	241.25	1.15		6
4.2	2347	216.28	1.28		6
4.9	2021	186.30	1.48		6
5.5	1803	255.71	1.66	R 96 RF96	4
5.8	1701	241.25	1.76		4
6.5	1525	216.28	1.97		4
7.5	1314	186.30	2.29		4
8.2	1199	170.02	2.50	R 88 RF88	4
9.3	1063	150.78	2.82		4
11	894	125.75	3.30		4
12	821	110.48	3.65		4
6.5	1627	216.54	1.02	R 88 RF88	4
6.8	1451	206.71	1.07		4
7.7	1282	181.77	1.21		4
8	1098	155.34	1.41		4
8.8	1004	142.41	1.54	R 88 RF88	4
11	881	124.97	1.78		4
12	805	110.43	1.86		4
14	731	103.85	2.12		4
15	689	93.30	2.35	R 78 RF78	4
17	578	81.92	2.68		4
19	510	72.37	3.04		4
22	448	63.50	3.46		4
23	424	60.18	3.66	R 68 RF68	4
27	371	52.67	4.18		4
12	856	121.42	0.90	R 78 RF78	4
14	726	102.99	1.13		4
15	656	92.97	1.25		4
17	577	81.80	1.42		4
18	545	77.24	1.50	R 68 RF68	4
21	464	65.77	1.77		4
25	398	56.38	2.06		4
28	359	50.90	2.28		4
31	316	44.78	2.59	R 58 RF58	4
33	298	42.29	2.75		4
39	254	36.01	3.23		4
43	231	32.72	3.56		4
16	607	86.11	0.99	R 68 RF68	4
19	523	74.17	1.15		4
20	492	69.75	1.20		4
23	432	61.28	1.39		4
25	401	56.89	1.50	R 58 RF58	4
27	364	51.56	1.65		4
30	326	46.29	1.84		4
35	281	39.88	2.06		4
37	264	37.50	2.16	R 48 RF48	4
43	228	32.27	2.37		4
49	203	28.63	2.59		4
60	203	28.19	2.88		4
52	192	26.72	2.81	R 38 RF38	4
60	169	23.44	3.31		4
70	143	19.89	4.20		4
72	139	19.35	4.44		4
77	130	18.08	4.80	R 28 RF28	4
90	113	15.63	5.75		4
105	98	13.28	6.75		4
118	85	11.86	7.80		4
138	73	10.13	9.17	R 18 RF18	4
172	59	8.16	11.57		4
183	56	7.83	12.04		4
212	47	6.59	14.76		4
250	40	5.60	17.48	R 16 RF16	4
280	36	5.00	19.44		4
328	31	4.27	23.01		4
350	29	4.00	24.00		4
415	24	3.37	28.29	R 14 RF14	4
472	20	2.88	33.33		4
540	17	2.47	39.68		4
600	15	2.13	45.00		4

输出转速	输出扭矩	传动比	服务系数	机 型 号	级 数	输出转速	输出扭矩	传动比	服务系数	机 型 号	级 数	
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole	
r/min	Nm	i	f _s	Type	p	r/min	Nm		f _s	Type	p	
1.1kW						1.5kW						
240	41	5.63	2.88	RX 78 RXF78	4	1.3	10080	1090	0.79	R 138 R78 RF138 R78	4	
262	39	5.35	2.64		4	1.3	9988	1080	0.80			
296	35	4.73	3.51		4	1.4	9433	1020	0.85			
301	51	4.83	1.81	RX 68 RXF68	6	1.5	8795	951	0.91			
212	49	4.3	1.63		6	1.6	8037	889	1.00			
241	45	3.77	2.02		6	1.7	7665	831	1.04			
309	33	4.53	2.48		RX 68 RXF68	4	1.8	7047	762			1.14
326	32	4.3	2.50			4	2	6326	684			1.26
371	28	3.77	3.11	4		2.2	5817	629	1.38			
438	24	3.2	4.17	4		2.4	5503	595	1.49			
484	21	2.89	5.05	4		2.5	5179	560	1.61			
551	19	2.54	6.21	4		2.9	4532	490	1.77			
583	18	2.4	6.63	4		3.2	4041	437	1.98			
686	15	2.04	8.93	4		3.7	3524	381	2.27			
753	14	1.89	9.00	4		4.3	2996	324	2.67			
870	12	1.61	9.50	4		2.6	5012	542	0.88			
1000	10	1.4	10.40	4	2.7	4772	518	0.90				
240	43	3.79	1.60	RX 58 RXF58	6	2.9	4532	490	0.95			
258	40	3.55	1.73		6	3	4426	469	0.97			
290	36	3.14	1.81		6	3.3	4020	426	1.07			
313	33	2.91	2.03		6	3.4	3838	415	1.12			
345	30	2.64	2.30		6	3.7	3558	377	1.21			
389	28	3.79	2.46	RX 58 RXF58	4	3.8	3413	369	1.26			
394	26	3.55	2.65		4	4.5	2954	313	1.46			
446	23	3.11	2.83		4	4.2	3167	336	0.97			
461	21	2.91	3.19		4	4.7	2737	296	1.10			
530	19	2.84	3.63		4	5.2	2548	270	1.18			
581	17	2.37	4.06		4	5.6	2303	249	1.30			
686	15	2.04	4.60		4	6	2008	234	1.36			
729	14	1.82	4.93		4	6.2	2142	227	1.40			
848	12	1.65	5.76		4	6.7	1979	209	1.62			
946	11	1.46	6.18		4	3	4466	228.67	0.96			
1077	10	1.3	6.30	4	3.4	3948	202.20	1.09				
700	15	2	0.87	RX 38 RXF38	4	4	3347	171.33	1.28			
819	13	1.71	1.15		4	4.4	3082	157.84	1.40			
875	12	1.6	1.23		4	5.7	2658	249.37	1.18			
1.5kW						4	3348	228.87	1.28	R 108 R58 RF108 R58	6	
0.60	21126	2331	0.85	R 168 R98 RF168 R98	4	4.5	2959	202.20	1.45			
0.68	18797	2074	0.96		4	5.4	2510	171.53	1.71			
0.75	17144	1850	1.05		4	5.8	2311	157.94	1.86			
0.84	15089	1666	1.19		4	6.5	2068	141.17	2.08			
0.96	13180	1452	1.37		4	5.5	2459	255.71	1.22			
1.1	11648	1285	1.55	4	5.8	2320	241.25	1.29				
1.2	10504	1139	1.71	4	6.5	2090	216.26	1.44				
1.4	9294	1005	1.94	4	7.5	1792	188.30	1.67				
3.3	3948	427	3.29	R 148 R88	4	8.2	1635	170.02	1.83			
3.8	3403	368	3.82	RF148 R88	4	9.0	1450	150.78	2.07			
0.63	15768	1705	0.82	R 98 R78 RF98 R78	4	11	1219	126.75	2.46			
0.91	14205	1536	0.92		4	12	1120	116.48	2.68			
1.1	12281	1329	1.06		4	14	995	103.44	3.02			
1.2	10568	1168	1.23		4	15	888	92.48	3.37			
1.4	9516	1029	1.37		4	7.7	1746	181.77	0.89			
1.6	8222	889	1.56		4	8	1494	155.34	1.04			
1.8	7250	784	1.79		4	9.8	1370	142.41	1.13			
2	6427	695	2.02		4	11	1003	124.97	1.29			
2.3	5725	610	2.37		4	12	1139	118.43	1.36			
2.5	5160	558	2.52		4	14	997	103.65	1.55			
						15	898	93.38	1.73	R 88 R78 RF88 R78	4	
						17	798	81.92	1.97			
						19	696	72.37	2.23			
						22	611	63.50	2.54			
						23	579	60.18	2.68			
						27	507	52.67	3.06			
						30	456	47.45	3.40			
						34	400	41.63	3.88			
						38	353	36.73	4.39			

R

输出转速	输出扭矩	传动比	服务系数	机 型 号	级 数	输出转速	输出扭矩	传动比	服务系数	机 型 号	级 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _s	Type	P	r/min	Nm	i	f _s	Type	P
1.5kW						1.5kW					
15	894	92.97	0.82	R 78 RF78	4	180	70	7.70	2.14	R 48 RF48	4
17	787	81.80	1.04			201	68	8.98	2.34		
18	743	77.24	1.10			233	59	8.00	2.64		
21	633	65.77	1.30			248	55	5.84	2.82		
25	542	56.38	1.51			288	48	4.85	3.13		
28	480	50.90	1.67			323	43	4.34	3.40		
31	431	44.78	1.90			368	38	3.83	3.78		
33	407	42.29	2.01			73	190	19.31	1.05	R 38 RF38	4
39	346	36.01	2.37			78	177	18.05	1.13		
43	315	32.72	2.60			90	163	16.60	1.31		
49	273	28.35	3.00			106	130	13.25	1.46		
57	237	24.67	3.29			118	116	11.83	1.58		
60	230	23.37	3.57			138	99	10.11	1.73		
65	210	21.43	3.90			148	93	9.47	1.80		
74	185	18.80	4.22			176	78	7.97	2.00		
23	589	61.26	1.02	210	66	6.87	2.18				
25	547	56.89	1.10	247	56	5.07	2.54				
27	495	51.55	1.21	277	50	5.08	2.70				
30	445	46.29	1.35	324	42	4.32	3.00				
35	384	39.88	1.51	346	40	4.05	3.05				
37	361	37.50	1.58	411	33	3.41	3.39				
43	310	32.27	1.74	90	154	15.63	0.84	R 28 RF28	4		
49	277	28.83	1.88	105	130	13.25	1.00				
50	278	28.13	1.96	118	116	11.86	1.11				
52	262	28.72	2.06	138	99	10.13	1.23				
60	230	23.44	2.40	172	80	8.16	1.45				
70	195	19.69	3.08	183	75	7.63	1.48				
78	175	17.95	3.35	212	65	6.59	1.83				
28	512	53.22	0.88	250	55	5.80	1.80				
29	484	48.23	0.97	280	49	5.00	1.94				
32	416	43.30	1.08	328	42	4.27	2.07				
36	359	37.30	1.25	350	39	4.00	2.18				
40	337	35.07	1.34	415	33	3.37	2.33				
46	290	30.18	1.55	248	56	5.83	1.96				
52	259	26.97	1.74	262	54	5.85	1.91				
53	258	26.31	1.74	296	47	4.73	2.52				
56	245	24.99	1.84	347	41	4.04	3.48				
64	215	21.83	2.09	378	37	3.7	4.14				
75	183	18.60	2.46	431	33	3.25	5.62				
83	165	16.79	2.73	453	31	3.08	6.23				
95	145	14.77	3.00	510	27	2.7	7.06				
100	137	13.95	3.14	576	24	2.43	8.96				
118	117	11.88	3.46	309	45	4.53	1.82	RX 78 RXF78	4		
38	355	36.93	0.85	326	43	4.3	1.86				
40	334	34.75	0.90	371	38	3.77	2.28				
47	287	29.68	1.05	438	32	3.2	3.13				
52	257	26.70	1.17	484	29	3.89	3.66				
58	227	23.59	1.32	551	25	2.54	4.73				
60	225	23.26	1.31	583	24	2.4	5.13				
64	214	21.81	1.40	686	20	2.04	6.76				
73	189	19.27	1.58	753	19	1.88	8.63				
78	175	17.69	1.65	870	16	1.61	7.13				
88	159	16.22	1.73	1000	14	1.4	7.43				
98	143	14.56	1.85								
112	123	12.54	2.03								
119	115	11.79	2.11								
138	100	10.15	2.30								
154	89	9.07	2.47								
175	79	8.01	2.59								

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P		
1.5kW							
389	38	3.79	1.82	RX 58 RXF58	4		
394	36	3.55	1.92				
446	31	3.14	2.10				
481	29	2.91	2.31				
530	26	2.64	2.68				
591	24	2.37	2.88				
686	20	2.04	3.45				
729	19	1.92	3.63				
848	17	1.65	4.06				
946	15	1.48	4.53				
1077	13	1.3	4.85				
2.2kW							
3.8	4935	368	0.87	R 108 R78 RF108 R78	4		
4.4	4421	324	0.97				
4.5	4271	313	1.01				
5	3889	286	1.11				
5	3798	284	1.13				
5.5	3493	258	1.23				
5.6	3383	259	1.27				
6.5	3002	220	1.43				
6.6	2862	214	1.50				
6.1	3183	234	0.84			R 98 R58 RF98 R58	4
6.3	3098	227	0.87				
6.8	2832	209	1.05				
2.2kW							
0.65	21634	1665	0.82	R 168 R98 RF168 R98	4		
0.88	19029	1452	0.95				
1.1	16640	1265	1.07				
1.2	15232	1139	1.18				
1.4	13440	1005	1.34				
1.6	11681	872	1.54				
1.8	10337	773	1.74				
2.1	8973	671	2.01				
2.7	7128	533	1.82			R 148 R88 RF148 R88	4
3.1	6176	462	2.10				
3.3	5710	427	2.28				
3.9	4921	368	2.64				
4.4	4380	328	2.98				
2.2kW							
1.2	15281	1166	0.85	R 148 R78 RF148 R78	4		
1.4	13761	1029	0.94				
1.6	11888	889	1.09				
1.8	10484	784	1.24				
2	9294	695	1.40				
2.3	8278	619	1.57				
2.5	7460	558	1.74				
2.9	6553	490	1.98				
1.8	10180	762	0.79	R 138 R78 RF138 R78	4		
2.1	8147	684	0.87				
2.3	8411	629	0.95				
2.4	7957	585	1.01				
2.5	7609	564	1.04				
2.5	7489	560	1.07				
2.7	7055	517	1.13				
2.8	6558	490	1.22				
3.1	6195	454	1.29				
3.2	5844	437	1.37				
3.7	5085	381	1.57				
4.2	4628	339	1.73				
4.4	4383	324	1.85				
4.8	4053	297	1.97				
4.9	3891	291	2.06				
5.6	3410	255	2.35				
6.4	2962	223	2.68				
2.2kW							
3.2	6181	222.60	1.29	R 138 RF138	8		
3.8	5241	188.45	1.53				
4.1	4851	174.40	1.85				
4.5	4347	158.31	1.84				
5	3925	141.12	2.04				
5.5	3585	128.18	2.24				
6.2	3183	113.72	2.53				
6.9	2870	103.20	2.79				
5.2	3787	278.08	1.60	R 128 RF128	4		
6	3286	242.01	1.84				
6.5	3018	221.88	2.0				
7.4	2686	195.76	2.27				
8.7	2282	168.06	2.67				
9.5	2082	152.00	2.90				
11	1851	136.67	3.25				
12	1678	123.03	3.61				
4.5	4248	202.20	1.01	R 108 RF108	6		
5.5	3603	171.53	1.19				
6	3315	157.94	1.30				
6.7	2966	141.17	1.45				
5.7	3476	249.97	1.24	R 108 RF108	4		
6.2	3183	228.67	1.36				
6.3	2812	202.50	1.50				
7	2385	171.59	1.80				
9	2186	157.94	1.96				
10	1963	141.17	2.19				
11	1767	127.08	2.43				
12	1600	115.08	2.69				
14	1419	102.05	3.03	R 98 RF98	4		
15	1283	92.97	3.35				
6.6	3008	216.28	1.00				
7.6	2581	188.30	1.16				
8.4	2384	170.02	1.27				
9.4	2097	150.78	1.43				
11	1763	126.75	1.70				
12	1620	116.48	1.85				
14	1438	103.44	2.09	R 86 RF86	4		
15	1286	92.48	2.33				
17	1156	83.15	2.80				
20	1004	72.17	2.99				
22	908	65.12	3.31				

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole p
2.2kW					
11	1736	124.97	0.89	R 68 RF68	4
12	1647	116.43	0.84		
14	1441	103.65	1.08		
15	1299	93.38	1.19		
17	1109	81.92	1.36		
20	1006	72.37	1.54		
22	880	63.50	1.76		
24	837	60.15	1.85		
27	732	50.67	2.12		
30	680	47.45	2.35		
34	579	41.63	2.68		
39	511	36.73	3.03		
44	450	32.57	3.42		
51	387	27.81	3.88		
41	489	34.40	3.07		
45	446	31.40	3.48		
51	395	27.84	3.92		
61	332	23.40	4.67		
68	305	21.51	4.92		
25	764	66.36	1.05	R 78 RF78	4
28	708	60.90	1.16		
32	623	44.76	1.32		
34	588	42.29	1.39		
39	501	38.01	1.64		
43	455	30.72	1.80		
50	394	28.35	2.08		
58	343	24.67	2.27		
61	332	23.37	2.47		
66	304	21.43	2.70		
76	267	18.80	2.92		
80	253	17.82	3.08		
91	222	15.60	3.33		
101	200	14.55	3.60		
36	555	39.86	1.05	R 88 RF88	4
38	521	37.50	1.09		
44	449	32.27	1.20		
49	401	26.83	1.30		
61	333	23.44	1.68		
71	282	19.89	2.13		
79	255	17.85	2.31		
90	224	15.79	2.50		
95	212	14.91	2.59		
112	180	12.70	2.89		
123	164	11.54	3.06		
142	142	10.00	3.31		
163	124	8.70	3.65		
182	111	7.78	3.42		
38	519	37.30	0.87	R 58 RF58	4
40	488	35.07	0.92		
47	420	30.15	1.07		
53	375	26.87	1.20		
65	311	21.93	1.45		
76	264	18.60	1.70		
85	238	16.79	1.89		
96	210	14.77	2.07		
102	198	13.95	2.17		
2.2kW					
120	169	11.68	2.40	R 58 RF58	4
132	153	10.79	2.55		
152	133	9.35	2.78		
167	129	9.06	2.91		
178	113	7.97	3.14		
74	274	19.27	1.14	R 48 RF48	4
79	254	17.89	1.08		
88	230	16.22	1.20		
99	207	14.56	1.28		
113	178	12.54	1.40		
120	167	11.79	1.47		
140	144	10.15	1.60		
157	126	9.07	1.71		
177	114	8.01	1.80		
183	110	7.76	1.48		
204	99	6.99	1.61		
237	85	6.00	1.84		
252	80	5.84	1.94		
293	69	4.85	2.17		
327	62	4.34	2.35		
371	54	3.83	2.67		
91	222	15.60	0.90	R 38 RF38	4
107	188	13.25	1.01		
120	168	11.83	1.09		
140	144	10.11	1.18		
150	134	9.47	1.25		
178	113	7.97	1.38		
213	95	6.87	1.52		
250	81	5.67	1.75		
281	72	5.08	1.88		
328	61	4.32	2.07		
351	58	4.05	2.10		
416	48	3.41	2.33		
140	144	10.13	0.85	R 28 RF28	4
215	94	8.59	1.13		
254	80	5.60	1.24		
284	71	5.00	1.34		
333	61	4.27	1.43		
355	57	4.00	1.48		
421	48	3.37	1.65		
300	69	4.73	1.78	R 28 RXF28	4
351	59	4.04	2.42		
384	54	3.7	2.83		
437	47	3.25	3.97		
461	45	3.08	4.29		
526	39	2.7	5.51		
584	35	2.43	6.14		
667	31	2.13	6.45		
755	27	1.88	6.93		
850	24	1.67	7.21		
1000	21	1.42	7.38		
377	55	3.77	1.58	R 68 RXF68	4
444	46	3.2	2.17		
491	42	2.89	2.52		
559	37	2.54	3.19		
592	35	2.4	3.51		
696	30	2.04	4.47		
783	27	1.98	4.67		
882	23	1.81	4.96		
1014	20	1.4	5.20		
452	46	3.14	1.41	R 58 RXF58	4
538	38	2.84	1.62		
609	34	2.37	2.03		
696	30	2.04	2.30		
740	28	1.92	2.48		
861	24	1.65	2.88		
959	21	1.48	3.24		
1092	19	1.3	3.32		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
3.0kW						3.0kW					
60	345	17.82	2.26	R 78 RF78	4	109	258	6.52	4.30	RX 128	8
81	302	15.60	2.45							RXF128	8
101	272	14.05	2.65			220	128	6.45	1.00	RX 88	4
115	239	12.33	2.89			255	110	5.56	2.05		
131	211	10.88	3.13			280	100	5.07	2.50		
147	187	9.84	3.37			316	89	4.5	3.25		
163	166	8.59	3.60			376	75	3.78	4.07	RX 78	4
209	132	6.79	4.39								
61	454	23.44	1.23	R 68 RF68	4	300	94	4.73	1.31	RX 78	4
71	365	19.89	1.58			351	80	4.04	1.79		
79	348	17.95	1.70			384	73	3.7	2.10		
90	306	15.79	1.83			427	64	3.25	2.84		
95	289	14.91	1.90			461	61	3.08	3.18	RX 68	4
112	246	12.70	2.11								
123	223	11.54	2.24			077	75	3.77	1.16		
142	194	10.00	2.42			444	63	3.2	1.59		
53	511	28.97	0.88	R 58 RF58	4	491	57	2.89	1.86	RX 58	4
65	425	21.93	1.06			559	50	2.54	2.36		
76	360	18.60	1.25			592	47	2.4	2.62		
85	325	16.79	1.38			696	40	2.04	3.35		
86	286	14.77	1.52			763	37	1.86	3.41	RX 58	4
102	270	13.95	1.59			882	32	1.81	3.56		
120	230	11.88	1.76			1014	26	1.4	3.71		
132	209	10.79	1.87			452	62	3.14	1.05	RX 58	4
152	181	9.35	2.04	R 48 RF48	4	538	52	2.84	1.33		
157	175	9.06	2.14			599	47	2.37	1.47		
176	154	7.97	2.31			698	40	2.04	1.73		
189	145	7.53	2.40			740	38	1.92	1.82	RX 58	4
222	124	6.41	2.70			861	35	1.65	2.09		
244	113	5.80	2.83			959	29	1.48	2.34		
281	98	5.05	3.11			1092	26	1.3	2.42		
323	85	4.39	3.29							R 168 R98 RF168 R98	4
88	314	16.22	0.88	R 48 RF48	4	1.7	20908	872	0.86		
98	282	14.56	0.94			1.9	18534	775	0.87		
113	243	12.54	1.03			2.1	16068	671	1.12		
120	228	11.79	1.07			2.8	12132	506	1.48		
140	197	10.15	1.17			3.8	9059	377	1.99		
157	176	9.07	1.25			4.0	7984	333	2.25		
177	155	8.01	1.32			2.7	12779	533	1.02	R 148 R98 RF148 R98	4
183	150	7.78	1.09			3.1	11077	462	1.17		
204	135	6.96	1.18			3.4	10238	427	1.27		
237	116	6.00	1.34			3.9	8823	368	1.47		
252	109	5.64	1.42			4.4	7816	326	1.66		
290	94	4.85	1.60			5.1	6713	280	1.94		
327	84	4.34	1.74			5.8	5922	247	2.20		
371	74	3.83	1.95			6.7	5131	214	2.53		
140	196	10.11	0.87	R 38 RF38	4	7.6	4532	189	2.87	R 138 R78 RF138 R78	4
150	183	9.47	0.91			9.1	3812	159	3.41		
178	154	7.97	1.01			2.3	14841	619	0.88		
213	129	6.67	1.12			2.6	13379	558	0.97		
250	110	5.67	1.29			2.9	11748	480	1.11		
281	98	5.05	1.38			3.5	9950	415	1.31		
329	84	4.32	1.50			3.8	9135	381	0.98		
351	78	4.05	1.56			4.2	8294	339	0.96		
416	68	3.41	1.70			4.4	7788	324	1.03		
254	186	5.60	0.92	R 28 RF28	4	4.8	7266	297	1.10	R 108 R78 RF108 R78	4
284	97	5.00	0.98			6.0	8977	291	1.15		
333	83	4.27	1.05			6.6	6114	255	1.31		
355	77	4.00	1.10			8.5	5347	223	1.50		
421	55	3.37	1.22			7.9	4722	193	0.91		
						7.7	4464	187	0.96		
						8.5	4159	170	1.03		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	级 数 Pole P	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	级 数 Pole P		
4.0kW						4.0kW							
4.4	8144	163.31	1.60	R 148 RF148	8	52	693	27.81	2.16	R 68 RF68	4		
4.9	7325	146.91	1.77			42	876	34.40	1.71				
6	5977	119.86	2.18			46	800	31.40	1.94				
6.6	5451	109.31	2.38			52	709	27.84	2.19				
						58	596	23.40	2.60				
4.1	8697	174.40	0.92	R 138 RF138	8	67	548	21.51	2.74			R 78 RF78	4
4.6	7795	158.31	1.03			78	486	19.10	2.96				
5.1	7037	141.12	1.14			84	435	17.08	3.20				
5.6	6392	128.18	1.25			94	391	15.35	3.43				
6.3	5671	113.72	1.41			108	339	13.33	3.78				
7	5146	102.20	1.55		121	304	11.93	4.05					
4.3	8325	222.00	0.96	R 138 RF138	6	62	585	23.37	1.38	R 58 RF58	4		
5.1	7046	188.45	1.14			67	546	21.43	1.50				
5.5	6523	174.40	1.23			77	479	18.80	1.53				
6.1	5846	158.31	1.37			81	454	17.82	1.72				
6.8	5276	141.12	1.52			92	397	15.60	1.86				
7.5	4794	128.18	1.67	R 128 RF128	4	102	358	14.05	2.01			R 48 RF48	4
8.4	4263	113.72	1.88			117	314	12.33	2.20				
9.3	3680	103.20	2.07			132	277	10.88	2.38				
11	3317	88.70	2.41			148	245	9.64	2.57				
						168	219	8.59	2.88				
6	5992	242.01	1.01	R 108 RF108	4	186	197	7.74	3.10	R 38 RF38	4		
6.5	5487	221.58	1.10			212	173	6.79	3.35				
7.4	4847	195.78	1.25			240	153	5.99	3.53				
8.7	4112	168.06	1.47			271	135	5.31	3.78				
9.5	3786	152.90	1.60										
11	3584	136.67	1.79	R 108 RF108	4	72	500	19.89	1.19			R 28 RF28	4
12	3046	123.03	1.99			80	467	17.95	1.29				
13	2759	111.41	2.18			91	402	15.79	1.39				
15	2446	98.80	2.47			97	380	14.91	1.45				
16	2212	89.33	2.73			113	323	12.70	1.61				
19	1675	75.71	3.23	R 98 RF98	4	125	294	11.54	1.70	R 18 RF18	4		
9.1	3938	157.84	1.09			144	255	10.00	1.84				
10	3520	141.17	1.22			166	222	8.70	1.98				
11	3169	127.06	1.36			185	198	7.78	1.92				
13	2659	115.08	1.50			196	167	7.36	1.98				
14	2544	102.05	1.69	R 98 RF98	4	230	160	6.27	2.06			R 8 RF8	4
16	2301	92.27	1.87			253	145	5.70	2.14				
18	1950	78.20	2.21			292	120	4.93	2.30				
20	1817	72.88	2.37			336	109	4.29	2.48				
22	1636	65.60	2.65										
24	1481	58.41	2.90	R 78 RF78	4	77	474	18.80	0.85	R 18 RF18	4		
27	1315	52.58	3.27			86	428	16.79	1.05				
						97	376	14.77	1.16				
12	2904	116.48	1.03			103	355	13.95	1.21				
14	2579	102.44	1.16			121	303	11.88	1.34				
16	2306	92.48	1.30	133	275	10.79	1.42						
17	2073	83.15	1.45	154	238	9.35	1.55	R 58 RF58	4				
20	1799	72.17	1.67	189	231	9.06	1.62						
22	1624	65.12	1.85	181	203	7.97	1.75						
24	1492	58.84	2.01	191	182	7.53	1.82						
27	1325	53.14	2.26	225	163	6.41	2.06						
30	1185	47.51	2.53	247	146	5.82	2.16						
34	1085	40.77	2.82	285	129	5.05	2.36						
39	925	37.08	3.24	328	112	4.39	2.50						
43	828	33.20	3.49							R 48 RF48	4		
52	687	27.54	3.89	142	258	10.15	0.89						
45	816	32.05	3.14	159	231	9.07	0.95						
53	682	27.19	3.70	180	204	8.01	1.00						
58	637	25.03	4.44	186	186	7.78	0.82						
64	570	22.37	4.77	207	177	6.96	0.90						
				240	153	6.00	1.02						
23	1583	63.50	0.98	255	144	5.64	1.08						
24	1500	60.18	1.03	297	124	4.85	1.21						
27	1313	52.67	1.16	332	111	4.34	1.32						
30	1183	47.45	1.31	376	98	3.83	1.47						
35	1038	41.63	1.49										
39	916	36.73	1.69										
44	812	32.57	1.91										

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机型号 Type Type	极数 Pole p
4.0kW					
110	339	6.52	3.27	RX 128	8
123	305	5.67	3.64	RXF128	8
147	254	6.02	4.37	RX 128	6
				RXF128	6
259	145	5.56	1.55	RX 68	4
284	132	5.07	1.89	RXF68	4
320	117	4.5	2.48		
361	98	3.78	3.11		
366	105	4.04	1.36		
389	96	3.7	1.59		
443	81	3.25	2.17		
468	80	3.08	2.41		
533	70	2.7	3.07	RX 78	4
593	63	2.43	3.41	RXF78	4
678	55	2.13	3.64		
766	49	1.88	3.82		
862	43	1.67	4.02		
1014	37	1.42	4.19		
450	63	3.2	1.20		
498	75	2.89	1.41		
567	66	2.54	1.79		
600	62	2.4	1.98	RX 68	4
708	53	2.04	2.53	RXF68	4
774	48	1.88	2.83		
894	42	1.61	2.71		
1029	36	1.4	2.89		
545	68	2.84	1.00		
600	62	2.37	1.11		
706	53	2.04	1.30		
750	50	1.92	1.38	RX 58	4
873	43	1.65	1.60	RXF58	4
973	38	1.48	1.79		
1108	34	1.3	1.85		
5.5kW					
2.1	22121	671	0.81		
2.5	18890	573	0.95		
2.8	16682	506	1.08		
3.3	14572	442	1.24	R 168 R88	4
3.8	12429	377	1.45	RF168 R88	4
4.3	10978	333	1.64		
4.8	9923	301	1.81		
5.2	9196	279	1.98		
3.1	15237	462	0.85		
3.4	14077	427	0.92		
3.9	12132	368	1.07		
4.4	10747	326	1.21	R 148 R88	4
5.1	9231	280	1.41	RF148 R88	4
5.8	8143	247	1.60		
6.7	7055	214	1.84		
7.8	6231	189	2.08		
3.7	13501	196.90	1.33		
4.5	10967	160.23	1.64	R 168	8
5.5	8998	131.20	2.00	RF168	8
6	8227	119.98	2.16		
6.9	7159	104.41	2.51		
4.4	11188	163.31	1.16		
4.9	10073	146.91	1.29	R 148	8
6	8218	119.88	1.58	RF148	8
6.6	7495	109.31	1.73		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机型号 Type Type	极数 Pole p
5.5kW					
30	1627	47.45	0.95		
35	1427	41.63	1.09		
39	1259	36.73	1.23		
44	1117	32.57	1.38		
52	953	27.81	1.57		
52	975	27.84	1.59		
62	819	23.40	1.88		
67	753	21.51	1.99	R 88	4
75	669	19.10	2.15	RF88	4
84	588	17.08	2.32		
84	537	18.35	2.50		
108	467	13.33	2.74		
121	418	11.93	2.94		
145	347	9.90	3.40		
168	320	9.14	3.79		
175	286	8.22	4.03		
202	250	7.13	4.28		
77	658	18.80	1.19		
81	624	17.82	1.25		
92	546	15.60	1.36		
102	492	14.05	1.46		
117	432	12.33	1.60		
132	381	10.88	1.70	R 78	4
149	338	9.64	1.86	RF78	4
168	301	8.59	2.09		
186	271	7.74	2.25		
212	238	6.79	2.44		
240	210	5.99	2.67		
271	186	5.31	2.74		
91	553	15.79	1.01		
97	522	14.91	1.05		
113	445	12.70	1.17		
125	404	11.54	1.24		
144	350	10.00	1.34		
166	305	8.70	1.44	R 68	4
185	273	7.79	1.59	RF68	4
198	258	7.36	1.63		
230	220	6.37	1.50		
253	200	5.70	1.55		
292	173	4.83	1.68		
336	150	4.29	1.80		
97	517	14.77	0.84		
109	488	13.95	0.88		
121	416	11.88	0.97		
133	378	10.79	1.03		
154	327	9.35	1.10	R 58	4
181	279	7.87	1.27	RF58	4
191	264	7.53	1.33		
225	224	6.41	1.50		
247	204	5.82	1.57		
285	177	5.05	1.72		
328	154	4.39	1.82		
297	170	4.85	0.88	R 48	4
332	162	4.34	0.96	RF48	4
378	134	3.83	1.07		
5.5kW					
116	443	8.2	3.79	RX 158	8
				RXF158	8
123	420	5.87	2.64	RX 128	8
				RXF128	8
147	355	6.52	3.17	RX 128	6
164	315	5.87	3.52	RXF128	6
182	283	5.28	3.92		
217	237	6.83	1.94		
257	201	5.81	2.26	RX 108	4
277	188	5.19	3.74	RXF108	4
310	168	4.65	4.19		
249	207	5.79	2.03		
293	175	4.91	2.26		
319	162	4.82	3.67		
356	144	4.04	4.13		
396	130	3.64	4.58		
436	118	3.3	5.04	RX 98	4
493	104	2.92	5.72	RXF98	4
545	94	2.64	6.33		
643	80	2.24	7.44		
735	70	1.96	8.14		
878	59	1.64	8.56		
1014	51	1.42	8.92		
320	161	4.5	1.80		
381	135	3.76	2.26		
414	124	3.46	3.23	RX 88	4
466	110	3.09	3.54	RXF88	4
522	99	2.78	4.04		
581	89	2.48	4.49		
670	77	2.15	5.60		
443	116	3.25	1.57		
488	110	3.08	1.75		
533	97	2.7	2.22		
580	87	2.43	2.47	RX 78	4
676	76	2.13	2.63	RXF78	4
766	67	1.88	2.79		
862	60	1.67	2.88		
1014	51	1.42	3.04		
587	91	2.54	1.30		
600	88	2.4	1.43		
706	73	2.04	1.84	RX 68	4
774	66	1.86	1.91	RXF68	4
894	58	1.61	1.87		
1029	50	1.4	2.08		
706	73	2.04	0.95		
750	69	1.92	1.00		
873	59	1.65	1.17	RX 58	4
973	53	1.46	1.28	RXF58	4
1108	46	1.3	1.37		
7.5kW					
2.9	22436	506	0.80		
3.3	19598	442	0.82		
3.9	16716	377	1.08	R 158 R88	4
4.4	14785	333	1.22	RF158 R88	4
4.9	13346	301	1.35		
5.2	12371	278	1.46		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机型号 Type Type	极数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机型号 Type Type	极数 Pole p
7.5kW						7.5kW					
4.5	14455	326	0.90	R 140 R88 RF140 R88	4	24	2759	59.84	1.09	R 98 RF98	4
5.2	12416	280	1.06			27	2450	53.14	1.32		
5.9	10552	247	1.19			31	2191	47.51	1.37		
6.8	9459	214	1.37			34	1970	42.72	1.62		
7.7	8390	189	1.55			39	1710	37.08	1.75		
9.2	7050	159	1.84			44	1531	33.20	1.89		
3.7	16410	199.90	0.98	R 168 RF168	6	53	1270	27.54	2.10	R 88 RF88	4
4.5	14982	180.23	1.20			56	1509	32.05	1.70		
5.5	12287	131.20	1.47			54	1280	27.19	2.00		
6	11216	119.98	1.60			58	1179	25.03	2.40		
6.9	9762	104.41	1.84			65	1053	22.37	2.58		
						72	948	20.14	2.75		
4.9	13608	199.90	1.20	R 168 RF168	6	80	859	18.24	2.91	R 88 RF88	4
5	11236	160.23	1.60			40	1694	36.73	0.91		
7.3	9200	131.20	1.98			45	1502	32.57	1.03		
8	8414	119.98	2.14			52	1262	27.81	1.17		
9.2	7322	104.41	2.46			52	1311	27.84	1.16		
10	6481	92.14	2.79			62	1102	23.40	1.41		
12	5602	79.88	3.21	R 148 RF148	6	68	1013	21.51	1.48	R 88 RF88	4
14	4984	71.07	3.61			76	899	19.10	1.60		
15	4487	62.98	4.01			85	804	17.66	1.73		
16	4103	56.51	4.39			95	723	16.33	1.85		
4.4	15270	163.31	0.85			110	626	12.92	2.04		
4.9	13738	140.91	0.95			122	562	11.93	2.19		
6	11207	119.86	1.16	R 148 RF148	6	147	466	9.90	2.53	R 78 RF78	4
6.6	10221	109.31	1.27			160	430	9.14	2.81		
5.9	11452	103.31	1.14			173	387	8.22	3.00		
6.5	10302	148.91	1.26			205	536	7.13	3.16		
8	8405	119.86	1.55			224	301	6.39	3.39		
8.8	7655	109.31	1.70			275	250	5.20	3.64		
10	6834	94.60	1.98	R 138 RF138	4	78	885	16.80	0.88	R 68 RF68	4
12	5853	83.47	2.22			92	839	17.82	0.93		
8.4	8042	174.40	0.99			94	735	16.60	1.01		
9.3	7207	156.31	1.11			104	662	14.05	1.09		
10	6507	141.12	1.23			114	591	12.33	1.19		
11	5910	128.18	1.35			134	512	10.68	1.20		
13	5244	113.72	1.53	R 128 RF128	4	151	454	9.64	1.38	R 58 RF58	4
14	4759	103.20	1.68			170	405	8.59	1.56		
16	4090	86.70	1.96			183	364	7.74	1.68		
18	3731	80.91	2.14			215	320	6.79	1.81		
20	3389	73.49	2.36			244	262	5.99	1.91		
22	3006	65.20	2.68			275	250	5.20	2.04		
29	2729	59.17	2.93	R 108 RF108	4	115	598	12.70	0.87	R 68 RF68	4
39	2345	50.86	3.41			127	543	11.64	0.92		
12	5712	123.03	1.06			146	471	10.00	1.00		
13	5173	111.41	1.17			168	410	8.70	1.07		
15	4587	98.80	1.32			187	367	7.79	1.04		
16	4147	89.93	1.46			198	347	7.36	1.07		
19	3515	75.71	1.72	R 108 RF108	4	233	295	5.27	1.12	R 58 RF58	4
22	3070	66.13	1.97			258	269	5.70	1.16		
28	2588	55.31	2.36			296	232	4.93	1.25		
30	2223	47.68	2.72			340	202	4.29	1.34		
33	2015	43.40	3.00			183	575	7.87	0.95		
39	1708	36.78	3.54			194	555	7.53	0.99		
16	4255	92.27	1.91	R 108 RF108	4	228	302	6.41	1.11	R 58 RF58	4
19	3606	78.20	1.19			251	274	5.82	1.17		
20	3380	72.88	1.28			288	238	5.05	1.28		
22	3025	65.60	1.42			333	207	4.38	1.35		
25	2739	59.41	1.57								
28	2429	52.68	1.77								
31	2186	47.63	1.96	R 108 RF108	4						
36	1861	40.37	2.31								
41	1626	35.26	2.54								
50	1360	29.49	3.15								
47	1449	30.77	2.97								
53	1299	27.56	3.31								
59	1173	24.90	3.67								

输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数	输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _s	Type	P	r/min	Nm	i	f _s	Type	P		
7.5kW						11kW							
155	453	6.2	3.70	RX 158 RXF158	6	5.9	15063	247	0.81	R 148 R88 RF148 R88	4		
123	572	5.87	1.94	RX 126 RXF126	8	6.8	13817	214	0.93		4		
						7.7	12291	189	1.06		4		
						9.2	10340	159	1.26				
164	429	5.87	3.59	RX 128 RXF128	6	7.0	12938	181.32	3.67	R 168	4		
182	386	5.26	2.87		8.7	11341	167.70	4.41	RF168	4			
223	315	4.31	3.52										
224	313	6.52	3.55	RX 128 RXF128	4	6.4	15417	227.97	1.95	R 178 RF178	4		
249	282	5.87	3.94	9.6	10293	152.30	3.11		4				
					11	9217	136.28	3.47					
220	319	6.53	1.44	RX 108 RXF108	4	6	16480	180.23	1.09	R 168 RF168	6		
260	270	5.61	1.89		7.3	14494	131.20	1.39			6		
281	249	5.19	2.79		8	12340	119.98	1.46					
314	224	4.85	3.10		9.2	10739	104.41	1.68					
348	202	4.2	4.11										
258	278	5.70	1.51	RX 98 RXF98	4	7.4	13318	196.90	1.35	R 168 RF168	4		
297	236	4.91	1.87			8.1	10838	180.23	1.66			4	
323	217	4.52	2.74			11	8673	131.20	2.03				
361	194	4.04	3.07			12	8114	119.98	2.22				
401	175	3.64	3.40			14	7061	104.41	2.55				
442	159	3.3	3.74			16	6231	92.14	2.89				
500	140	2.92	4.25	18	5407	79.88	3.39						
					21	4806	71.07	3.75					
324	216	4.5	1.34	RX 88 RXF88	4	8	12328	119.88	1.06	R 148 RF148	6		
386	182	3.78	1.68			8.8	11243	109.31	1.16			6	
420	167	3.48	2.40			10	9730	94.60	1.34				
472	149	3.09	2.68			12	8565	83.47	1.51				
529	133	2.75	3.01										
588	119	2.46	3.36										
679	103	2.15	3.74			8.9	11044	183.31	1.18	R 148 RF148	4		
756	93	1.93	3.82			9.9	9935	146.91	1.31		4		
813	77	1.6	4.09			12	8106	119.86	1.60				
1050	67	1.39	4.33			13	7392	109.31	1.76				
						15	6399	94.60	2.03				
						17	5645	83.47	2.30				
449	156	3.25	1.17	RX 78 RXF78	4	20	4875	72.09	2.67	R 138 RF138	4		
474	148	3.08	1.30			22	4530	66.99	2.87				
541	130	2.7	1.65			24	4131	61.09	3.15				
601	117	2.43	1.84			29	3575	52.87	3.64				
685	102	2.10	1.96										
777	90	1.86	2.06			13	7681	113.72	1.04		R 108 RF108	4	
874	80	1.87	2.16	14	6979	103.20	1.15		4				
1029	68	1.42	2.28	16	5989	88.70	1.35						
				18	5472	80.91	1.46						
				20	4970	73.49	1.61						
				22	4499	65.20	1.81						
575	122	2.94	0.97	RX 68 RXF68	4	25	4092	59.17	2.00	R 108 RF108	4		
609	115	2.4	1.07			29	3445	50.88	2.39				
716	98	2.04	1.37			33	3002	44.39	2.60				
765	89	1.86	1.42			39	2546	37.65	3.14				
907	77	1.61	1.48			44	2226	32.81	3.59				
1043	67	1.4	1.55										
11kW						11kW							
4.9	19315	297	0.83	R 168 R108 RF168 R108	4	19	5156	73.71	1.17	R 128 RF128	4		
5.4	17689	272	1.02			22	4602	66.13	1.34			4	
6.3	15022	231	1.20			26	3786	55.31	1.61				
6.5	14799	223	1.22			30	3261	47.69	1.85				
7.2	13156	202	1.37			33	2965	43.40	2.05				
8.5	11120	171	1.62			39	2505	36.78	2.41				
4.4	21656	333	0.83	R 168 R98 RF168 R98	4	45	2188	32.13	2.78	R 108 RF108	4		
4.9	19575	301	0.92			54	1830	26.87	3.31			4	
5.2	18144	279	0.99			62	1584	23.26	3.84				
						22	4436	65.60	0.87		R 108 RF108		
						25	4018	59.41	1.07				
						28	3583	52.88	1.21				
				31	3221	47.63	1.33						
				36	2750	40.37	1.58						
				41	2385	35.25	1.80						
		</											

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机型号 Type Type	极数 Pole P
11kW					
47	2125	30.77	2.02	R 108 RF108	4
53	1955	27.58	2.26		
59	1720	24.90	2.50		
65	1563	22.62	2.75		
73	1388	20.07	3.10		
80	1258	18.21	3.42		
34	2689	42.72	1.04	R 98 RF98	4
39	2508	37.05	1.20		
44	2245	33.20	1.29		
53	1882	27.54	1.43		
58	1729	25.03	1.64		
65	1545	22.37	1.79		
72	1391	20.14	1.86		
80	1280	18.24	1.98		
90	1117	16.17	2.16		
100	1010	14.62	2.28		
116	896	12.39	2.56		
135	748	10.83	2.79		
157	642	9.29	3.16		
174	579	8.39	3.51		
205	492	7.12	4.07		
235	429	6.21	4.41		
68	1486	21.51	1.01	R 88 RF88	4
76	1319	19.10	1.08		
85	1180	17.08	1.18		
95	1060	15.35	1.26		
110	921	13.33	1.39		
122	824	11.93	1.48		
147	684	9.90	1.73		
160	631	9.14	1.92		
176	568	8.22	2.04		
205	492	7.13	2.57		
228	441	6.39	2.91		
270	366	5.30	3.48		
134	751	10.88	0.86	R 78 RF78	4
151	666	9.64	0.95		
169	595	7.74	1.14		
215	469	6.79	1.34		
244	414	5.89	1.30		
275	387	5.31	1.39		
189	545	6.08	3.08	RX 158 RXF158	6
207	498	4.54	3.37		
238	433	4.04	3.86	RX 158 RXF158	4
235	437	6.2	3.84		
249	414	5.67	3.66	RX 128 RXF128	4
277	372	5.28	2.98		
339	304	4.31	3.65		
372	277	3.93	4.01		
281	368	5.19	1.90	RX 108 RXF108	4
314	328	4.65	2.12		
346	296	4.2	2.80		
383	269	3.81	3.09		
432	238	3.38	3.49		
476	216	3.07	3.84		
553	188	2.54	4.46		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
11kW					
323	319	4.52	1.87	RX 98 RXF98	4
361	285	4.04	2.08		
401	257	3.64	2.32		
442	233	3.3	2.55		
500	206	2.92	2.89		
553	186	2.64	3.20		
652	158	2.24	3.77		
745	138	1.96	4.13		
880	116	1.64	4.35		
1028	100	1.42	4.55		
420	245	3.48	1.53	RX 88 RXF88	4
472	218	3.09	1.88		
529	195	2.76	2.05		
589	175	2.48	2.29		
679	152	2.15	2.53		
756	136	1.93	2.61		
913	113	1.8	2.79		
1050	98	1.39	2.96		
601	171	2.43	1.26	RX 78 RXF78	4
689	150	2.13	1.33		
777	133	1.88	1.41		
874	118	1.67	1.47		
1028	100	1.42	1.55		
15kW					
6.3	20485	231	0.86	R 168 RF168	4
6.5	20178	223	0.89		
7.2	17913	202	1.00		
7.6	17027	195	1.06		
8.5	15184	171	1.19		
7.6	17642	191.32	2.83	R 188 RF188	4
8.7	15485	187.70	3.23		
9.8	13775	149.37	3.82		
10	13322	144.46	3.75		
11	12079	131.02	4.10		
11	11872	128.89	4.21		
6.4	21029	227.97	1.43	R 178 RF178	4
7.2	18826	204.14	1.58		
7.8	17251	187.06	1.85		
8.7	15449	167.52	2.07		
9.6	14038	152.20	2.26		
11	12568	136.29	2.55		
12	11228	121.76	2.85		
13	10095	109.03	3.16		
15	8943	98.07	3.58		
15	8700	94.34	3.68		
7.4	18211	131.20	0.99	R 168 RF168	6
8.1	16854	119.98	1.08		
9.3	14493	104.41	1.24		
11	12789	92.14	1.41		
7.4	18158	198.90	0.99	R 168 RF168	4
8.1	14778	160.23	1.22		
11	12099	131.20	1.49		
12	11065	119.98	1.65		
14	9629	104.41	1.87		

输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数	输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _s	Type	P	r/min	Nm	i	f _s	Type	P		
15kW						15kW							
15	8487	92.14	2.12	R 168 RF168	4	85	1609	17.08	0.86	R 88 RF88	4		
18	7367	79.88	2.44										
21	6554	71.07	2.75										
23	5900	63.98	3.05										
25	5396	58.51	3.34										
8.9	15173	109.31	0.86	R 148 RF148	6	122	1124	11.93	1.09				
10	13131	94.60	0.99										
12	11588	83.47	1.12										
13	10006	72.09	1.30										
14	9299	66.99	1.40										
8.9	15060	103.31	0.86	R 148 RF148	4	287	488	5.08	3.44	RX 158	4		
9.9	13548	146.91	0.96				315	448	4.64	3.78	RXF158	4	
12	11053	119.86	1.10				361	388	4.04	4.33			
13	10081	108.31	1.29										
15	8724	94.60	1.49				372	379	3.93	2.94	RX 128	4	
17	7688	83.47	1.68								RXF128	4	
20	6648	72.09	1.86										
22	6178	66.99	2.10				281	499	5.19	1.38	RX 108 RXF108	4	
24	5634	61.09	2.31				314	447	4.65	1.55			
28	4876	50.87	2.67				346	404	4.2	2.05			
31	4302	46.65	3.02				383	368	3.81	2.27			
							432	325	3.38	2.55			
					476	295	3.07	2.81					
					553	254	2.64	3.27					
					635	221	2.3	3.76					
					749	187	1.95	4.09					
					854	164	1.71	4.30					
					1014	138	1.44	4.67					

输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数	输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _s	Type	p	r/min	Nm	i	f _s	Type	p		
18.5kW						18.5kW							
7.9	21131	187.06	1.51	R 178 RF178	4	119	1428	13.38	1.53	R 98 RF98	4		
8.8	18824	167.52	1.69			136	1240	10.63	1.67				
9.7	17183	152.20	1.86			158	1072	9.29	1.80				
11	15398	136.29	2.08			175	968	8.39	2.10				
12	13754	121.76	2.33			206	821	7.12	2.44				
13	12316	109.03	2.60			237	716	6.21	2.64				
15	10954	96.97	2.92			283	609	5.20	2.97				
16	10657	94.34	3.00			327	519	4.50	3.14				
17	9508	84.17	3.37										
8.2	18100	160.23	0.99	R 158 RF158	4	110	1536	13.53	0.83	R 88 RF88	4		
11	14821	131.25	1.21			123	1376	11.93	0.89				
12	13553	119.98	1.33			148	1142	9.80	1.03				
14	11795	104.41	1.53			161	1054	9.14	1.15				
16	10409	92.14	1.73			179	948	8.22	1.22				
18	9024	79.88	1.99			206	823	7.13	1.50				
21	8026	71.07	2.24			230	737	6.39	1.38				
23	7227	63.98	2.49			277	611	5.30	1.49				
25	6610	58.51	2.72										
29	5751	50.91	3.13			317	546	4.54	3.07	RX 158	4		
						384	476	4.04	3.83	RXF158	4		
						412	430	3.57	4.00				
12	13540	119.86	0.96	R 148 RF148	4	350	495	4.2	1.66	RX 108 RXF108	4		
13	12348	109.31	1.06			386	449	3.81	1.85				
16	10665	94.60	1.22			435	398	3.38	2.09				
18	9429	83.47	1.38			479	362	3.07	2.28				
20	8144	72.09	1.60			507	311	2.64	2.87				
22	7567	68.99	1.72			639	271	2.3	3.09				
24	6901	61.09	1.88			754	230	1.95	3.80				
28	5979	52.87	2.18			860	201	1.71	3.51				
32	5270	46.86	2.47			1021	170	1.44	3.79				
36	4651	40.29	2.86										
20	8002	73.49	0.96	R 138 RF138	4	404	429	3.64	1.38	RX 98 RXF98	4		
23	7365	65.20	1.09			445	389	3.3	1.53				
26	6684	59.17	1.20			503	344	2.92	1.73				
29	5745	50.86	1.39			557	311	2.64	1.91				
33	5014	44.39	1.60			656	264	2.24	2.25				
39	4253	37.65	1.88			750	231	1.96	2.47				
45	3716	32.81	2.15			866	193	1.64	2.82				
53	3144	27.83	2.44			1036	167	1.42	2.72				
60	3411	26.57	2.28										
91	2783	24.12	2.87			533	325	2.76	1.23	RX 88 RXF88	4		
67	2536	22.00	3.15	583	292	2.45	1.37						
77	2197	19.04	3.84	684	253	2.15	1.62						
				762	227	1.93	1.56						
				919	188	1.5	1.68						
				1058	164	1.39	1.77						
30	5484	47.88	1.10	R 128 RF128	4	22kW							
33	4970	43.40	1.22			7.7	25681	191.32	1.95	R 168 RF168	4		
39	4212	36.78	1.44			8.8	22471	167.70	2.23				
45	3679	32.13	1.64			9.8	20178	149.37	2.48				
54	3077	26.87	1.97			10	19435	144.48	2.57				
62	2684	23.26	2.16			11	17624	131.02	2.84				
71	2374	20.30	2.35			11	17311	128.69	2.89				
83	2033	17.38	2.74			12	15829	117.67	3.16				
95	1785	15.26	3.12	13	15184	112.88	3.29						
112	1511	12.92	3.69	15	13637	101.38	3.67						
36	4860	40.37	0.94	R 108 RF108	4	16	12218	90.83	4.09				
42	3983	35.26	1.08			17	11459	85.19	4.36				
50	3301	29.49	1.29										
58	2873	24.90	1.50			7.9	25129	187.06	1.27	R 178 RF178	4		
66	2610	22.62	1.65			8.9	22504	167.52	1.42				
73	2315	20.07	1.86			9.7	20446	152.20	1.57				
81	2101	18.21	2.05			11	18309	136.29	1.75				
94	1806	15.65	2.38			12	16357	121.76	1.96				
108	1576	13.66	2.73	13	14647	109.03	2.18						
127	1307	11.59	3.22										
145	1168	10.13	3.68										
172	988	8.56	4.35										
187	907	7.86	3.27										
221	788	6.86	3.87										
23	2324	20.14	1.12	R 98 RF98	4								
81	2104	18.24	1.19										
91	1865	16.17	1.29										
101	1687	14.62	1.36										

输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数	输出转速	输出扭矩	传动比	服务系数	机 型 号	极 数																		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole																		
r/min	Nm	i	f _s	Type	p	r/min	Nm	i	f _s	Type	p																		
22kW						22kW																							
15	13027	96.97	2.46	R 178 RF178	4	73	2763	20.14	0.94	R 98 RF98	4																		
16	12673	94.34	2.53			81	2502	18.24	1.00																				
17	11307	84.17	2.83			91	2218	16.17	1.08																				
20	10125	75.37	3.16			101	2006	14.62	1.15																				
29	8631	64.25	3.71			119	1700	12.99	1.29																				
11	17625	131.20	1.02	R 108 RF108	4	139	1498	10.83	1.41	R 88 RF88	4																		
12	16118	116.98	1.12			158	1275	0.29	1.59																				
14	14026	104.41	1.25			175	1151	8.39	1.70																				
16	12378	92.14	1.45			206	977	7.12	2.05																				
18	10731	79.88	1.68			237	852	6.21	2.22																				
21	8547	71.07	1.89			293	713	5.20	2.50																				
23	8595	63.98	2.09			327	617	4.50	2.64																				
25	7860	58.51	2.29																										
29	6839	50.91	2.63			R 88 RF88	4	148	1358	0.90	0.87	RX 158 RXF158	4																
33	6038	44.93	2.98					161	1254	0.14	0.96																		
38	5232	38.95	3.44					179	1128	0.22	1.03																		
42	4656	34.66	3.87					205	978	7.13	1.09																		
49	4013	29.87	4.49					230	877	6.39	1.16																		
61	3260	24.27	5.02					277	727	5.30	1.25																		
45	4438	32.35	2.03																										
66	3611	26.32	2.77																										
70	2889	21.06	4.85																										
13	14684	109.31	0.89	R 148 RF148	4			412	500	3.57	3.38																		
16	12708	94.60	1.02					350	588	4.2	1.41	RX 108 RXF108	4																
18	11213	83.47	1.16			386	534	3.61	1.55																				
20	9684	72.09	1.34			435	473	3.38	1.75																				
22	8999	68.99	1.44			479	430	3.07	1.90																				
24	8207	61.09	1.58			557	370	2.64	2.24																				
28	7102	52.87	1.83			639	322	2.3	2.56																				
32	6267	46.65	2.07			754	279	1.95	2.80																				
36	5412	40.29	2.40			860	239	1.71	2.95																				
41	4766	35.64	2.72			1021	202	1.44	3.19																				
49	4023	29.86	3.23																										
25	7949	59.17	1.01	R 138 RF138	4	401	510	0.84	1.17	RX 88 RXF88	4																		
29	6832	50.86	1.17			445	462	3.3	1.29																				
33	5968	44.39	1.34			503	409	2.92	1.45																				
39	5058	37.65	1.58			557	370	2.64	1.61																				
45	4421	32.81	1.81			658	314	2.24	1.89																				
53	3739	27.83	2.05			750	275	1.86	2.07																				
60	4057	26.57	1.92			898	230	1.64	2.20																				
61	3309	24.12	2.42			1035	199	1.42	2.29																				
67	3018	22.00	2.65																										
77	2612	19.04	3.06			RX 88 RXF88	4	533	387	2.76	1.03																		
88	2305	16.80	3.47					593	347	2.48	1.15																		
101	1991	14.51	4.02					884	301	2.15	1.28																		
				782	270			1.93	1.31																				
				919	224			1.6	1.41																				
33	5810	43.40	1.02	R 128 RF128	4	1058	185	1.39	1.49																				
39	5009	36.78	1.21																										
45	4375	32.13	1.38																										
54	3699	26.87	1.65																										
62	3168	23.26	1.82																										
71	2823	20.30	1.97																										
83	2418	17.38	2.30																										
95	2123	15.26	2.62																										
112	1796	12.92	3.10																										
127	1582	11.38	3.52																										
30	3882	29.48	1.09	R 108 RF108	4	30kW																							
39	3416	24.90	1.26			7.7	35020	191.32	1.43	R 188 RF188	4																		
46	3103	22.62	1.39			8.8	30842	167.70	1.63			R 188 RF188	4																
73	2753	20.07	1.56			9.8	27515	149.37	1.82					R 188 RF188	4														
81	2498	18.21	1.72			10	26303	144.48	1.99							R 188 RF188	4												
94	2147	15.65	2.00			11	24033	131.62	2.06									R 188 RF188	4										
108	1874	13.66	2.29			11	23606	128.69	2.12											R 188 RF188	4								
127	1590	11.59	2.70			12	21585	117.67	2.32													R 188 RF188	4						
145	1390	10.13	3.09			13	20705	112.88	2.41															R 188 RF188	4				
172	1174	8.56	3.68			15	18597	101.38	2.69																	R 188 RF188	4		
187	1078	7.86	2.76			16	18861	90.83	3.00																			R 188 RF188	4
221	914	6.86	3.25			17	15826	85.19	3.20																				
253	796	5.82	5.72	18	14604	79.61	3.42	R 188 RF188	4																				
				20	13463	73.39	3.71			R 188 RF188	4																		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
30kW					
9.7	27881	152.20	1.15	R 178 RF178	4
11	24066	136.29	1.28		4
12	22005	121.76	1.43		
13	19973	109.03	1.60		
15	17763	96.97	1.80		
16	17282	94.34	1.85		
17	15419	84.17	2.08		
20	13807	75.37	2.32		
23	11770	64.25	2.72		
25	10389	59.44	2.94		
28	9751	53.23	3.28		
29	9293	50.73	3.44		
16	16879	92.14	1.07	R 168 RF168	4
18	14633	79.68	1.23		
21	13019	71.07	1.38		
23	11720	63.98	1.54		
25	10718	58.51	1.68		
29	9326	50.81	1.93		
33	8230	44.93	2.19		
38	7135	38.95	2.52		
42	6349	34.66	2.84		
49	5472	29.67	3.29		
61	4446	24.27	4.05		
71	3770	20.58	4.77		
56	4924	26.32	2.03	R 148 RF148	4
70	3940	21.06	2.55		
20	13206	72.09	0.98		
22	12272	66.99	1.06		
24	11191	61.09	1.16		
26	9605	52.87	1.34		
32	8546	46.65	1.52		
36	7361	40.29	1.76		
41	6529	35.64	1.99		
49	5486	29.65	2.37		
61	4431	24.19	2.89		
72	3824	20.44	3.14		
81	3375	18.04	3.11		
33	8132	44.39	0.98	R 138 RF138	4
39	6897	37.65	1.16		
45	6029	32.91	1.33		
53	5096	27.83	1.51		
61	4512	24.12	1.77		
67	4116	22.00	1.94		
77	3583	19.04	2.25		
88	3143	16.80	2.55		
101	2715	14.51	2.95		
115	2400	12.63	3.33		
136	2019	10.79	3.96		
169	1629	8.71	4.61		
184	1420	7.59	5.80		
45	5967	32.13	1.01	R 128 RF128	4
54	4990	26.87	1.21		
62	4320	23.26	1.33		
71	3849	20.30	1.45		
83	3297	17.38	1.68		
96	2894	15.29	1.92		
112	2450	12.92	2.27		
127	2157	11.38	2.58		
142	1931	10.18	2.88		
162	1695	8.94	3.26		
192	1438	7.50	3.41		
73	3755	20.07	1.15	R 108 RF108	4
81	3407	18.21	1.26		
94	2928	15.65	1.47		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
37kW					
38	8740	38.95	2.06	R 168 RF168	4
43	7776	34.66	2.31		
50	6703	29.67	2.69		
61	5446	24.27	3.31		
66	6032	28.32	1.66		
72	4618	20.58	3.90		
70	4820	21.06	2.90		
78	4292	18.73	3.03		
91	3738	16.31	4.28		
28	11864	52.87	1.19	R 148 RF148	4
32	10468	46.65	1.24		
37	9041	40.29	1.44		
42	7998	35.64	1.63		
49	6721	29.65	1.93		
61	5426	24.19	2.19		
72	4664	20.44	2.58		
82	4134	18.04	2.54		
90	3584	15.64	3.03		
106	3188	13.91	3.95		
45	7385	32.91	1.08	R 138 RF138	4
53	6245	27.83	1.23		
61	5526	24.12	1.45		
67	5042	22.00	1.59		
78	4364	19.04	1.83		
88	3850	16.80	2.08		
102	3325	14.51	2.41		
116	2940	12.83	2.72		
137	2475	10.79	3.23		
170	1996	8.71	3.83		
195	1739	7.59	2.94	R 128 RF128	4
232	1462	6.38	3.50		
287	1180	5.13	3.95		
62	5328	25.38	1.08		
71	4740	20.30	1.17		
88	4069	17.38	1.37		
95	3570	15.29	1.56		
112	3021	12.92	1.84		
127	2661	11.38	2.09		
142	2362	10.18	2.34		
162	2091	8.94	2.66		
182	1768	7.56	2.77		
218	1558	6.86	2.83		
261	1300	5.56	3.17		
74	4800	20.07	0.83	R 108 RF108	4
81	4175	18.21	1.03		
99	3587	15.65	1.20		
108	3131	13.66	1.37		
128	2656	11.59	1.62		
146	2322	10.18	1.85		
173	1962	8.56	2.19		
188	1801	7.86	1.65		
222	1526	6.66	1.95		
254	1334	5.62	2.23		
301	1128	4.93	2.57		
435	799	3.4	1.40	RX 128 RXF128	4
493	702	3	1.58		
571	608	2.59	1.83		
438	791	3.38	1.05	RX 108 RXF108	4
482	718	3.07	1.16		
501	618	2.64	1.34		
643	538	2.3	1.54		
759	456	1.95	1.68		
885	400	1.71	1.76		
1025	337	1.44	1.81		
45kW					
10	39488	144.48	1.27	R 188 RF188	4
11	35808	131.02	1.40		
12	36170	128.09	1.42		
18	32159	117.67	1.55		

输出转速	输出扭矩	传动比	服务系数	机 型 号	级 数	输出转速	输出扭矩	传动比	服务系数	机 型 号	级 数	
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole	
r/min	Nm	i	f _s	Type	P	r/min	Nm	i	f _s	Type	P	
45kW						55kW						
188	2191	7.86	1.36	R 108 RF108	4	95	5328	15.64	2.44	R 148 RF148	4	
222	1858	6.66	1.80		4	106	4739	13.91	3.06		4	
254	1622	5.82	1.83		4	129	4085	11.89	3.18		4	
301	1371	4.92	2.12		4	152	3318	9.74	3.92		4	
					179	2814	8.26	4.62				
					204	2470	7.25	3.51				
436	967	3.4	1.15	RX 128 RXF128	4	251	2007	5.89	4.32			
493	854	3	1.30		4							
571	737	2.59	1.51		4							
646	652	2.29	1.70		4							
767	549	1.93	2.02									
438	962	3.38	0.86	RX 108 RXF108	4	78	8488	19.04	1.23	R 138 RF138	4	
482	874	3.07	0.95		4	88	5723	16.80	1.40		4	
561	751	2.64	1.11		4	102	4943	14.51	1.62		4	
643	654	2.3	1.27		4	118	4071	12.83	1.85		4	
759	555	1.95	1.38		4	137	3678	10.79	2.18		4	
888	467	1.71	1.45		4	170	2867	8.71	2.84		4	
1028	410	1.44	1.57		4	195	2586	7.39	1.98			
						232	2179	6.38	2.95			
						287	1754	5.15	2.52			
						415	1242	3.87	1.35	RX 158	4	
						478	1075	3.09	1.56	RXF158	4	
55kW						75kW						
11	43783	181.02	1.14	R 188 RF188	4	15	46177	101.38	1.08	R 188 RF188	4	
12	42986	128.69	1.16		4	16	41372	90.83	1.21		4	
13	39306	117.67	1.27		4	17	38802	85.19	1.29		4	
13	37703	112.88	1.33		4	19	36283	79.61	1.38		4	
15	33863	101.38	1.48		4	20	33429	73.39	1.80		4	
16	30339	90.83	1.65		4	22	31242	68.59	1.80		4	
17	28455	85.19	1.78		4	23	28944	63.54	1.73		4	
19	26593	79.61	1.86		4	26	25445	55.86	1.97			
20	24515	73.39	2.04		4	31	21822	48.13	2.25			
22	22911	68.59	2.16		4	37	18421	40.44	2.71			
23	21226	63.54	2.36		4	42	15870	34.84	3.15			
26	18660	55.86	2.66		4							
31	16076	48.13	3.11	4								
16	31489	84.34	1.02	R 178 RF178	4	23	29225	64.25	1.09	R 178 RF178	4	
18	28077	64.17	1.14		4	25	27037	59.44	1.18		4	
20	25141	75.37	1.27		4	26	24213	53.23	1.32		4	
23	21432	64.25	1.49		4	29	23075	50.73	1.39		4	
25	19827	58.44	1.61		4	34	19892	43.60	1.61		4	
28	17758	53.23	1.90		4	38	17694	38.90	1.81		4	
29	16922	50.73	1.89		4	50	13505	29.89	2.37			
34	14544	43.60	2.20		4	54	12495	27.47	2.56			
38	12976	38.90	2.47		4	60	11190	24.60	2.96			
50	9904	29.89	3.23		4	63	10662	23.44	3.00			
54	9163	27.47	3.49		4	71	9548	20.99	3.35			
60	8206	24.60	3.90	4								
28	16982	50.91	1.06	R 168 RF168	4	38	17717	38.95	1.02	R 168 RF168	4	
33	14987	44.92	1.20		4	43	15766	34.66	1.14		4	
38	12993	38.95	1.39		4	50	13587	29.87	1.32		4	
43	11562	34.06	1.56		4	61	11040	24.27	1.63		4	
50	9884	29.87	1.81		4	70	9783	21.06	1.43		4	
61	8098	24.27	2.22		4	72	9381	20.58	1.92		4	
70	7174	21.06	1.95		4	79	8701	18.73	1.49		4	
72	6865	20.58	2.62		4	91	7577	16.31	2.11		4	
79	6381	18.73	2.04		4	102	6784	14.58	2.22			
91	5556	16.31	2.88		4	119	5765	12.41	3.12			
102	4980	14.58	3.02		4	144	4776	10.28	3.66			
119	4228	12.41	4.26		4	169	4074	8.77	4.17			
144	3802	10.28	4.86		4							
32	15561	48.85	0.84		R 146 RF146	4	40	13623	29.95		0.95	R 146 RF146
37	13440	40.29	0.97	4		61	11003	24.18	1.08	4		
49	11888	25.04	1.09	4		72	9495	20.44	1.35	4		
49	9990	29.95	1.20	4		82	8380	18.04	1.25	4		
61	8089	24.18	1.47	4		95	7285	15.84	1.79	4		
72	6983	20.44	1.72	4		106	6462	13.91	1.99	4		
82	6146	18.04	1.71	4		123	5570	11.89	2.33	4		
				4		152	4525	9.74	2.87	4		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
75kW					
179	3837	8.28	3.39	R 148 RF148	4
204	3368	7.25	2.57		4
251	2736	5.89	3.17		4
298	2323	5.00	3.73		4
479	1465	3.09	1.14	RX 158 RXF158	4
535	1304	2.75	1.29		4
624	1124	2.37	1.49		4
767	915	1.93	1.84		4
767	915	1.93	1.21	RX 128	4
949	740	1.56	1.50	HXF128	4
90kW					
16	40646	90.83	1.01	R 188 RF188	4
17	46563	85.19	1.07		4
19	43516	79.61	1.15		4
20	40115	73.39	1.25		4
22	37491	68.59	1.33		4
23	34733	63.54	1.44		4
26	30534	55.86	1.64		4
31	26307	48.13	1.90		4
37	22105	40.44	2.26		4
42	19044	34.84	2.63		4
49	16489	30.17	3.03		4
59	13741	25.14	3.64	4	
28	38957	50.23	1.11	R 178 RF178	4
29	37597	50.73	1.16		4
34	33719	43.60	1.35		4
38	31162	38.90	1.51		4
50	16151	29.89	1.98		4
54	14944	27.47	2.14		4
60	13382	24.60	2.39		4
63	12751	23.44	2.51		4
71	11419	20.99	2.80		4
81	10223	18.40	2.84		4
90	9156	16.48	2.85		4
42	18855	34.66	0.95	R 168 RF168	4
50	16249	29.87	1.11		4
61	13203	24.27	1.36		4
71	11700	21.06	1.20		4
72	11190	20.58	1.61		4
79	10406	18.73	1.25		4
91	9081	16.31	1.77		4
102	8089	14.58	1.85		4
120	6895	12.41	2.61		4
144	5711	10.28	2.88		4
169	4872	8.77	3.49		4
73	11356	20.44	1.05	R 148 RF148	4
82	10023	18.04	1.05		4
95	8689	15.84	1.50		4
107	7728	13.91	1.63		4
124	6681	11.98	1.95		4
152	5411	9.74	2.40		4
180	4589	8.28	2.83		4
206	4028	7.25	2.15		4
252	3272	5.89	2.65		4
297	2778	5.00	3.12		4

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
90kW					
540	1580	2.75	1.08	RX 158 RXF158	4
627	1344	2.37	1.29		4
769	1095	1.93	1.53	RX 128 RXF128	4
962	885	1.56	1.25		4
110kW					
20	49030	73.39	1.02	R 188 RF188	4
22	45822	68.59	1.08		4
23	42451	63.54	1.18		4
26	37320	55.86	1.34		4
31	32152	48.13	1.56		4
37	27017	40.44	1.85		4
42	23270	34.84	2.15		4
49	20163	30.17	2.48		4
59	16704	25.14	2.98		4
69	14319	21.43	3.49		4
83	12172	17.85	3.61	4	
34	28889	43.60	1.10	R 178 RF178	4
38	25864	38.90	1.24		4
50	19741	29.89	1.62		4
54	18265	27.47	1.75		4
60	16358	24.60	1.96		4
63	15585	23.44	2.05		4
71	13956	20.99	2.29		4
81	12484	18.40	2.32		4
90	11181	16.48	2.41		4
107	9405	13.85	3.30		4
61	16197	24.27	1.12	R 168 RF168	4
72	13684	20.58	1.32		4
91	11075	16.31	1.44		4
102	9987	14.58	1.52		4
120	8427	12.41	2.14		4
144	6981	10.28	2.44	RX 158 RXF158	4
169	5955	8.77	2.85		4
627	1643	2.37	1.02		4
769	1338	1.93	1.26	RXF158	4
911	1130	1.83	1.49		
132kW					
26	44784	55.86	1.13	R 188 RF188	4
31	39583	48.13	1.30		4
37	32421	40.44	1.54		4
42	27932	34.84	1.79		4
49	24184	30.17	2.07		4
59	20163	25.14	2.48		4
69	17183	21.43	2.91		4
83	14806	17.85	3.01		4
98	12583	15.38	3.48		4
112	10916	13.22	3.83		4

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
132kW					
38	31037	38.90	1.03	R 178 RF178	4
50	23889	29.89	1.35		4
54	21918	27.47	1.46		
60	19828	24.60	1.63		
63	18702	23.44	1.71		
71	16747	20.99	1.91		
81	14993	18.40	1.93		
90	13429	16.48	2.01		
107	11266	13.85	2.75		
124	9770	11.99	3.08		
160kW					
72	18420	20.88	1.10	R 188 RF188	4
91	13290	16.31	1.20		4
102	11864	14.58	1.26		
120	10112	12.41	1.78		
144	8377	10.28	2.03		
169	7146	8.77	2.38		
160kW					
31	46767	46.13	1.07	R 188 RF188	4
37	39298	40.44	1.27		4
42	33657	34.84	1.46		
48	29314	30.17	1.71		
59	24428	25.14	2.05		
68	20826	21.43	2.40		
83	17704	17.85	2.48		
96	15253	15.38	2.88		
112	13110	13.22	3.16		
129	11388	11.41	3.64		
160kW					
50	28714	29.89	1.11	R 178 RF178	4
54	26567	27.47	1.20		4
60	23791	24.60	1.35		
63	22669	23.44	1.41		
71	20300	20.99	1.58		
81	18174	18.40	1.60		
90	16277	16.48	1.66		
107	13880	13.85	2.27		
124	11842	11.99	2.70		
149	9867	9.99	3.14		
174	8415	8.52	3.45		
160kW					
120	12257	12.41	1.47	R 168 RF168	4
144	10153	10.28	1.67		4
169	8602	8.77	1.98		

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	服务系数 Service factor f _s	机 型 号 Type Type	极 数 Pole P
200kW					
37	49122	40.44	1.02	R 188 RF188	4
42	42321	34.84	1.18		4
48	36642	30.17	1.38		
59	30635	25.14	1.64		
68	26035	21.43	1.92		
83	22190	17.85	1.98		
96	18066	15.38	2.30		
112	16388	13.22	2.53		
129	14235	11.41	2.91		
152	12035	9.84	3.44		
200kW					
63	28337	23.44	1.13	R 178 RF178	4
71	26375	20.99	1.28		4
81	22717	18.40	1.28		
90	20347	16.48	1.33		
107	17099	13.85	1.81		
124	14803	11.99	2.16		
149	12334	9.99	2.51		
174	10519	8.52	2.76		

Max Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p
130	8.5	164	R 28 R18 RF28 R18	0.18
	8.9	158		
	10	139		
	12	118		
	13	104		0.25
	15	90		
	4.8	290		
	5.8	241		
200	6.2	220	R 38 R18 RF38 R18	0.18
	7.5	186		
	8.9	164		
	8.8	158		
	10	139		0.25
	11	124		
	13	105		
	15	90		
300	3.2	429	R 48 R38 RF48 R38	0.18
	3.7	372		
	4.0	348		
	4.8	301		
	5.5	255		0.25
	6.1	228		
	2.1	678		
	2.4	598		
450	2.6	537	R 58 R38 RF58 R38	0.18
	3.0	471		
	3.8	357		
	4.4	319		
	5.3	262		0.25
	5.8	241		
	1.7	835		
	1.9	750		
600	1.9	724	R 68 R38 RF68 R38	0.18
	2.2	640		
	2.4	574		
	2.4	571		
	2.8	485		0.25
	2.9	488		
	3.2	438		
	3.6	384		
820	4.0	344	R 78 R38 RF78 R38	0.25
	4.8	288		
	1.2	1124		
	1.3	1047		
	1.5	916		0.18
	1.6	858		
	1.8	767		
	2.1	671		
1550	2.4	571	R 88 R58 RF88 R58	0.18
	2.5	547		
	2.9	477		
	3.0	426		
	3.8	364		0.37
	4.5	310		
	5.0	277		
	5.8	249		

表上所配功率均有裕量,按实际条件确定的输出不得大于减速机额定转矩。The power are all overload in the table. The decided torque according to operating condition should not more than gear unit's nominal torque.


Max Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Max Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	
4300	0.21	5726	R 108 R78 RF108 R78	0.18	8000	0.40	3514	R 138 R78 RF138 R78	0.55	
	0.24	5881				0.41	3377			
	0.27	5203				0.42	3338			
	0.31	4418				0.47	2929			
	0.35	4009				0.48	2925			
	0.35	4009				0.52	2656			
	0.43	3343		0.25		0.50	2484		0.75	
	0.45	3056				0.56	2412			
	0.49	3034				0.62	2283			
	0.46	3025				0.67	2073			
	0.52	2653				0.75	1863			
	0.51	2280		0.37		0.76	1856			1.1
	0.67	2007				0.88	1586			
	0.70	1988				0.88	1586			
	0.76	1828				1.0	1397			
	0.82	1693				1.0	1380			
	0.88	1612		0.55		1.1	1228		1.5	
	0.89	1661				1.1	1228			
	1.0	1389				1.3	1090			
	1.1	1231				1.3	1060			
	1.3	1099				0.75			1.4	1020
	1.4	1027		1.5					951	
	1.5	944		1.6					869	
	1.6	899		1.7					851	
	1.7	824		1.9					762	
	1.8	797		1.1		2.1	684		3	
	2.0	685				2.3	629			
	2.3	612				2.4	598			
	2.3	611				2.5	564			
	2.6	542				2.5	500			
2.7	516	1.5		2.7	517	4				
2.9	490			2.9	490					
3.0	468			3.1	454					
3.3	426			3.3	437					
3.4	415			2.2		3.6	381	5.5		
3.6	377	4.2	339							
3.8	368	4.4	324							
4.4	324	4.8	297							
4.5	313	3		4.9	281	0.18				
5.0	285			5.0	258					
5.0	284			0.06	18210					
5.5	256			0.09	15922					
5.6	253			0.10	14075					
6.5	220			0.11	12343					
6.7	214	4		0.12	11160	0.25				
7.5	193			0.14	9742					
7.7	187			0.16	8455					
8.5	170			0.18	7494					
8000	0.12	11712	R 148 R78 RF148 R78	0.18	13000	0.28	8456	0.37		
	0.13	10628				0.25	5665			
	0.16	8784				0.29	4605			
	0.19	7406				0.32	4363			
	0.20	6412				0.37	3777			
	0.24	5619				0.42	3346			
	0.28	5002		0.25		0.50	2785	0.75		
	0.30	4710				0.55	2555			
	0.32	4364				0.63	2211			
	0.35	4019				0.72	1951			
	0.36	3878				0.82	1705			
				0.37		0.91	1536	1.5		

表上所列功率均有超载,按实际条件确定的转矩不得大于减速机额定转矩。The power are all overload in the table, The decided torque according to operating condition should not more than gear unit's nominal torque.

Max Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p
13000	1.1	1329	R 148 R78 RF148 R78	2.2
	1.2	1168		
	1.4	1029		
	1.6	889		3
	1.8	784		
	2.1	695		
	2.3	619		4
	2.6	558		
	2.9	490		
	2.7	533		5.5
	3.1	462		
	3.4	427		
4.0	368	R 148 R88 RF148 R88	5.5	
4.5	326	7.5		
5.8	214	11		
18000	0.05	26695	R 168 R98 RF168 R98	0.55
	0.06	23560		
	0.07	19927		
	0.08	17165		
	0.09	15685		
	0.10	13892		
	0.12	11678		
	0.13	10732		
	0.14	9717		
	0.23	6000		
	0.25	5514		
	0.29	4780		
	0.34	4127		
	0.18	7661		
	0.21	6798	1.1	
	0.37	3738		
	0.52	2669		
	0.60	2331	1.5	
	0.68	2074		
	0.77	1856		
	0.85	1668	2.2	
	0.96	1452		
	1.1	1285		
	1.2	1138	3	
	1.4	1005		
	1.7	872		
	1.9	773	4	
	2.1	671		
	2.5	573		
	2.9	506	5.5	
	3.3	442		
	3.9	377		
	4.4	333	7.5	
	4.9	301		
	5.2	279		
	6.0	297	11	
6.4	272			
6.6	260			
6.8	231	R 168 R108 RF168 R108	15	
8.5	223			
7.2	202			
7.6	192			


表上所列功率均有超载,按实际条件确定的转矩不得大于减速机额定转矩。The power are all overload in the table, The decided torque according to operating condition should not more than gear unit's nominal torque.

RX38

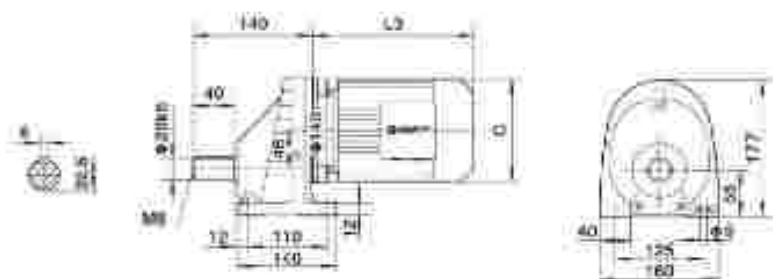

RX..S38

输入轴轴径尺寸见第17页
Please list the size of input shaft on page 17




电机需方带时或特殊电机时需加连接法兰
When equipping the user's motor or the special one, the flange is required to be connected.



注：其他尺寸见相应的结构形式
Note: for other dimensions, see the corresponding structures.


RXF38

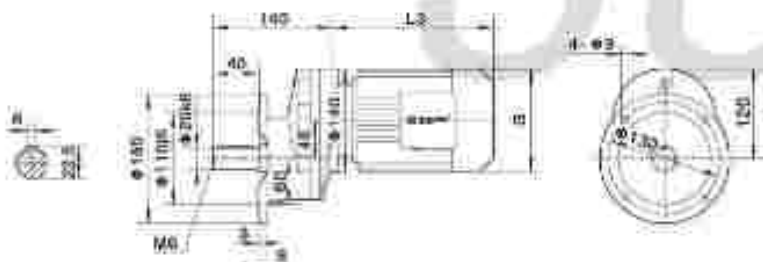

电机机座号 Motor size 功率/kW Power/kW	63	71	80	90S
L3	223	244	293	304
G	130	145	175	185
L2	56	56	62	62


注：“RX..”表示 RX、RFX
Note: “RX..” mean RX、RFX

RX58

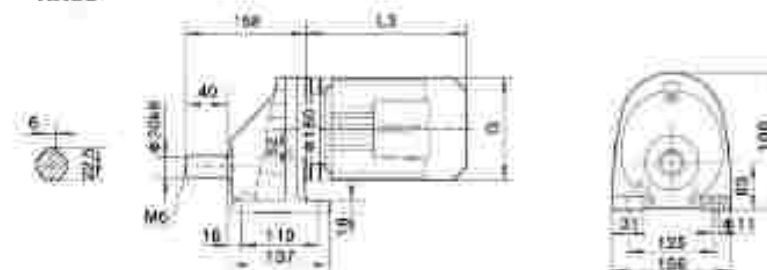


RX..S58

输入轴轴径尺寸见第17页
Please list the size of input shaft on page 17




RXF58

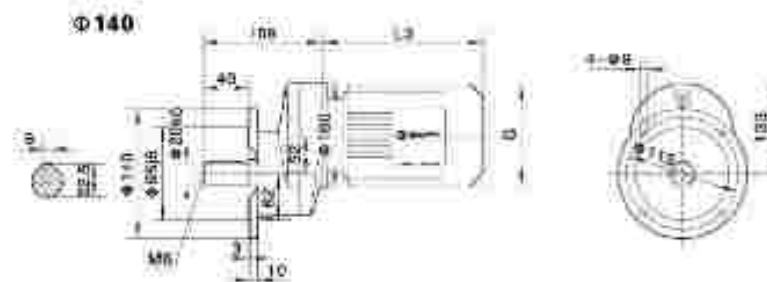

电机需方带时或特殊电机时需加连接法兰
When equipping the user's motor or the special one, the flange is required to be connected.



Φ150

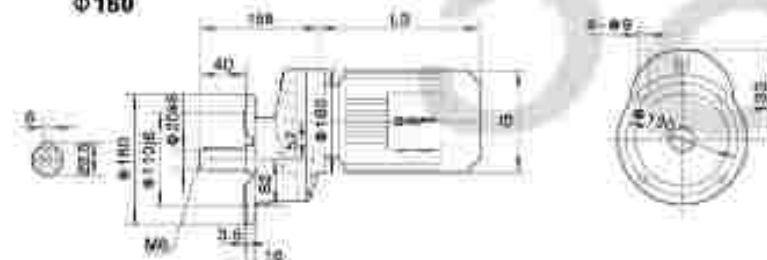

注：其他尺寸见相应的结构形式
Note: for other dimensions, see the corresponding structures.

Φ200




电机机座号 Motor size 功率/kW Power/kW	63	71	80	90S	90L	100	112M	132S
L3	223	244	293	304	325	357	385	425
G	130	145	175	185	195	215	240	275
L2	56	57	72	72	72	74	74	82

注：“RX..”表示 RX、RFX
Note: “RX..” mean RX、RFX


R

RX68

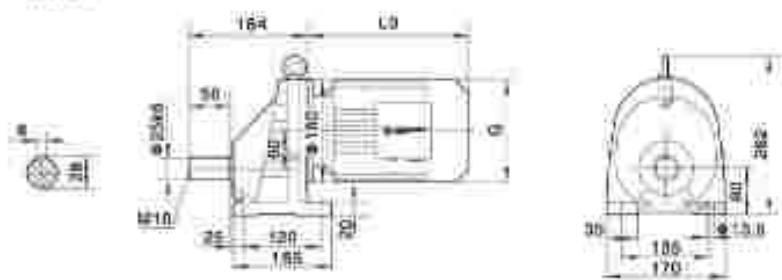


RX..S68

输入轴尺寸(见第17页)
Please find the size of input shaft on page 17



RXF68


Φ160

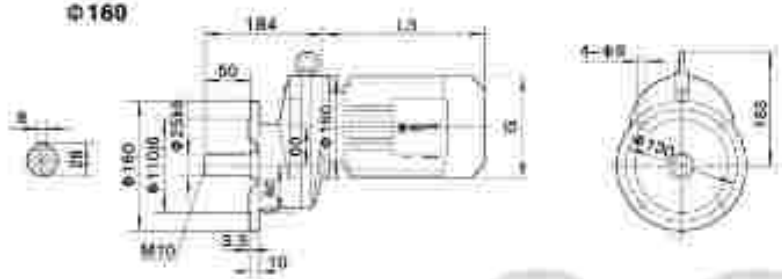

当配置方配时请选配电机时请选配法兰
When equipping the user's motor or the special one, the flange is required to be connected.




Φ200

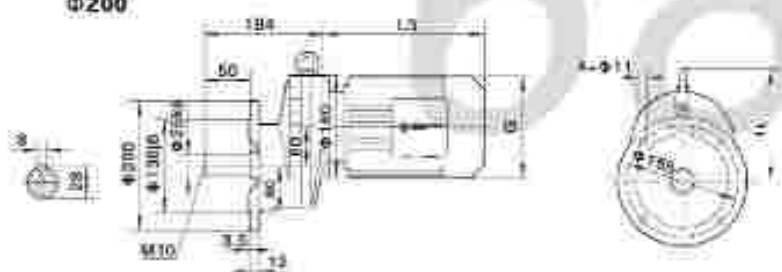

注：其他尺寸见相应的结构形式
Note: For other dimensions, see the corresponding structures

Φ250

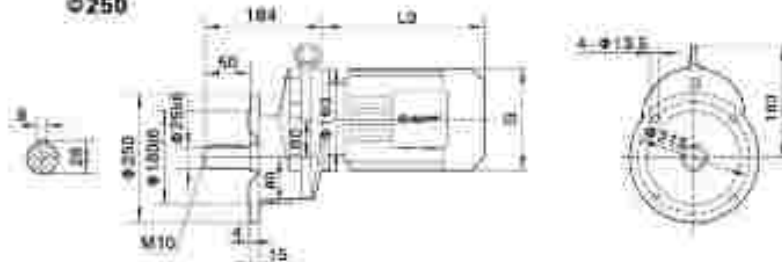


电机型号 Motor size	63	71	80	90S	90L	100	112M	132S	132M
功率/kW Power/kW	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0
L3	323	244	293	304	329	357	383	428	461
G	100	145	175	195	199	215	240	275	275
L2	58	67	72	72	72	74	74	82	82

注：“RX..”表示 RX, RXF Note: “RX..” mean RX, RXF


R

RX78

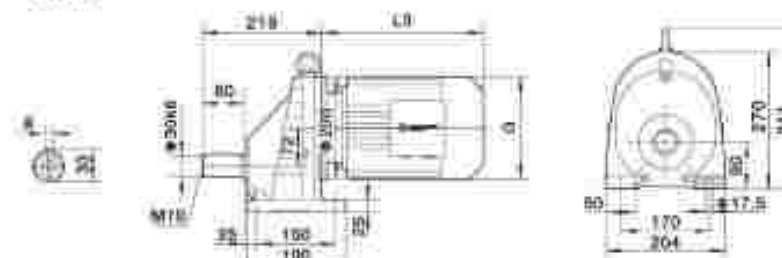


RX..S78

输入轴尺寸(见第17页)
Please find the size of input shaft on page 17




RXF78


Φ200

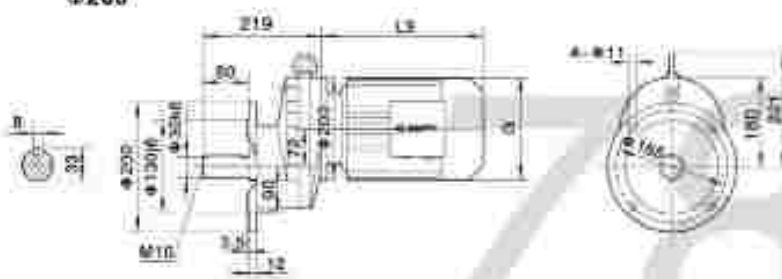

当配置方配时请选配电机时请选配法兰
When equipping the user's motor or the special one, the flange is required to be connected.



Φ250

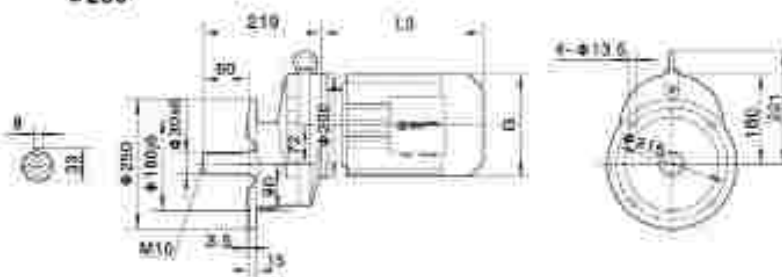

注：其他尺寸见相应的结构形式
Note: For other dimensions, see the corresponding structures

电机型号 Motor size	90S	90L	100	112M	132S	132M	160M
功率/kW Power/kW	1.1	1.5	2.2	3.0	4.0	5.5	7.5
L3	297	322	354	381	430	453	550
G	105	135	215	240	275	275	330
L2	63.5	63.5	65	65	68	68	99


注：“RX..”表示 RX, RXF

Note: “RX..” mean RX, RXF

R

RX..S98

Measure the slope of road shaft on place 12



当装备方配时或安装电动机时请加配法兰
When equipping the user a motor or the spiral one, the flange is required to be connected.

When equipping the user, a motor or the special and the flange is required to connected.



注：其单尺寸见相应的结构形式
Note: For other dimensions, see
the corresponding structures


Note: All other dimensions are taken from the corresponding structure.
Note: For other dimensions, see the corresponding structure.



Motor size	132S	132M	160M	160L	180M	180L	200
功率/kW	5.5	7.5	11	15	18.5	22	30
功率/kW	411	444	529	574	593	635	670
G	275	275	339	330	380	360	420
L2	77	77	113	113	113	115	106


Note: * RX_* mean RX, RXF

RX108

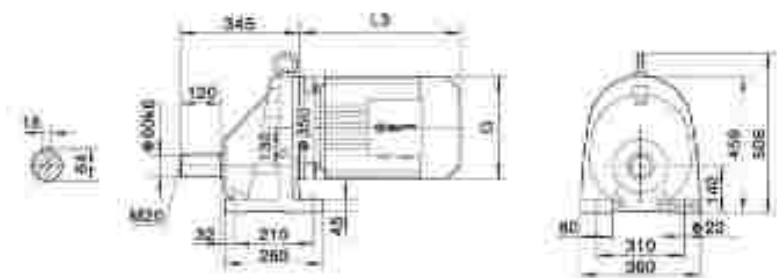


RX..S108


输入轴轴径尺寸见第18页
Please find the sizes of input shaft on page 18.



RXF108

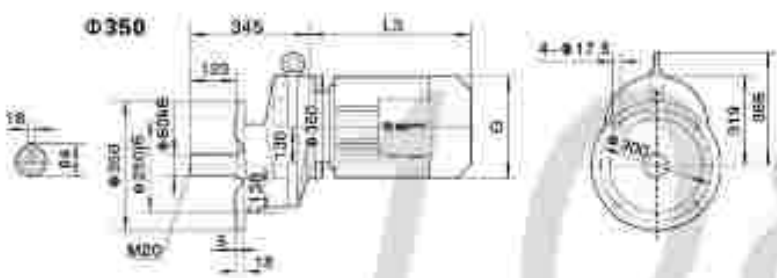

电机需方配时或特殊电机时请加装法兰
When equipping the user's motor or the special one, the flange is required to be connected.

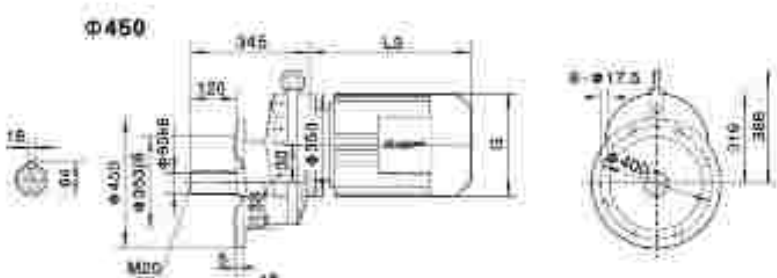

注：其余尺寸见相应结构形式
Note: For other dimensions, see the corresponding structures.

电机功率 Motor size 功率(kW) Power(kW)	132M	160M	160L	180M	180L	200	225S	225M
L3	420	400	335	383	633	688	684	700
G	275	330	330	380	380	470	470	470
L2	77	93	93	93	93	93	115	115

注：“R..”表示 R、RF Note: “R..”mean R、RF

RF输出法兰螺栓会高出轴肩，安装时请注意让开，防止干涉。

The RF output flange bolts will protrude above the shaft shoulder, so be careful to move them away during installation to prevent interference.

RX128




RX..S128

输入轴轴径尺寸见第18页
Please find the sizes of input shaft on page 18.



电机需方配时或特殊电机时请加装法兰
When equipping the user's motor or the special one, the flange is required to be connected.

RXF128

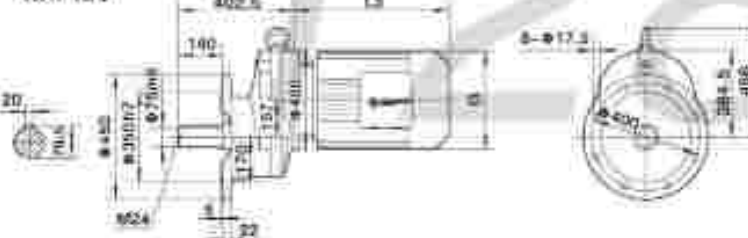

注：其余尺寸见相应结构形式
Note: For other dimensions, please refer to the supplied structure.

电机功率 Motor size 功率(kW) Power(kW)	132M	160M	160L	180M	180L	200	225S	225M	250	280S	280M
L3	420	400	335	383	633	688	628	703	784	845	845
G	275	330	330	380	380	420	470	470	510	580	580
L2	55	93	93	93	93	93	115	115	125	125	125

RX158




RX..S158

输入轴轴径尺寸见第18页
Please find the sizes of input shaft on page 18.



电机需方配时或特殊电机时请加装法兰
When equipping the user's motor or the special one, the flange is required to be connected.

RXF158

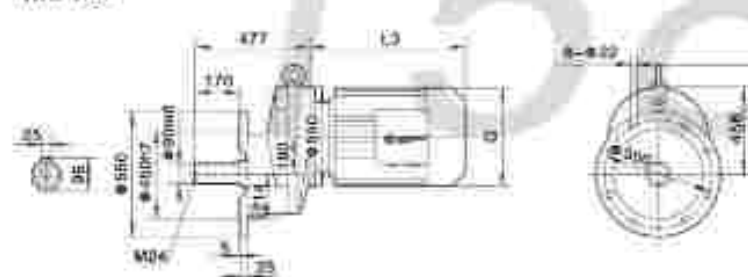

注：其余尺寸见相应结构形式
Note: For other dimensions, see the corresponding structures.


电机功率 Motor size 功率(kW) Power(kW)	160M	160L	180M	180L	200	225S	225M	250	280S	280M	315S	315M
L3	482	537	583	633	646	679	698	770	845	845	1100	1130
G	330	330	380	380	420	470	470	510	580	580	645	645
L2	66	88	88	96	96	120	120	133	133	133	143	143

注：“R..”表示 R、RF Note: “R..”mean R、RF


RF输出法兰螺栓会高出轴肩，安装时请注意让开，防止干涉。

The RF output flange bolts will protrude above the shaft shoulder, so be careful to move them away during installation to prevent interference.


R18

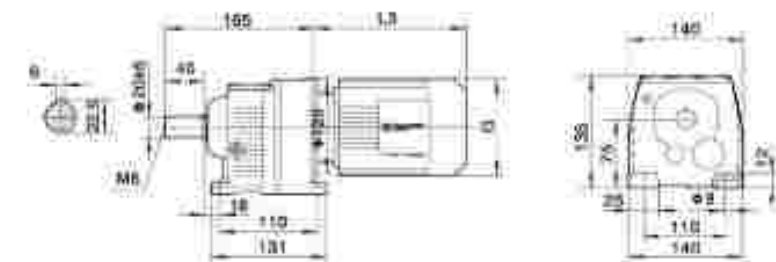

电机需方配时该需将电机时加出轴连接
When equipping the user a motor or the special one, the flange is required to connected.



RF18

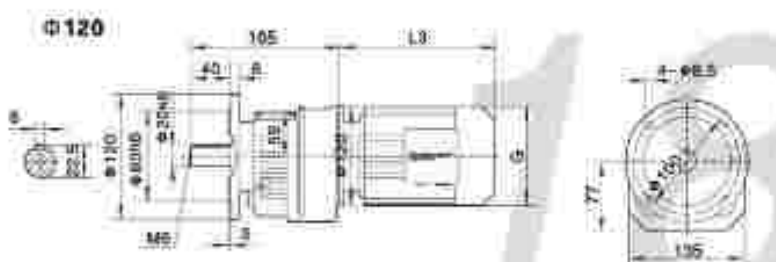


R.S18

输入轴尺寸请见第17页
Please find the size of input shaft on page 17



140

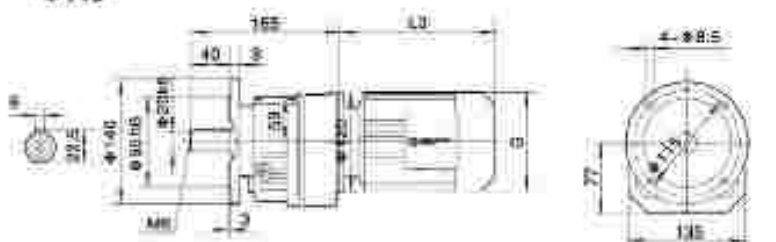

注：其他尺寸请见第17页
Note: For other dimensions, see the corresponding structure


电机规格号 Motor size 功率 (kW) Power (kW)	63	71	80						
L3	235	250	265						
G	130	145	175						
L2	55	65	62						

注：“R.”表示 R、RF
Note: “R.”mean R、RF
RF输出法兰螺栓会高出轴肩，安装时请注意让开，防止干涉；
The RF output flange bolts will protrude above the shaft shoulder, so be careful to move them away during installation to prevent interference;


R28



电机需方配时该需将电机时加出轴连接
When equipping the user a motor or the special one, the flange is required to connected.




RF28

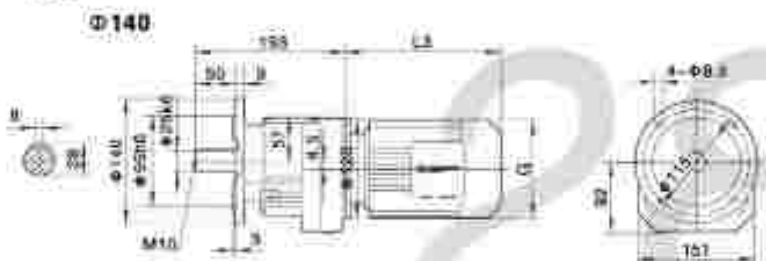

R.S28

输入轴尺寸请见第17页
Please find the size of input shaft on page 17



R.28 R18




注：其他尺寸请见第17页
Note: For other dimensions, see the corresponding structure

电机规格号 Motor size 功率 (kW) Power (kW)	63	71	80	90S	90L	100			
L3	235	250	265	280	333	347			
G	130	145	175	185	195	215			
L2	55	56	62	62	62	63			


注：“R.”表示 R、RF
Note: “R.”mean R、RF
RF输出法兰螺栓会高出轴肩，安装时请注意让开，防止干涉；
The RF output flange bolts will protrude above the shaft shoulder, so be careful to move them away during installation to prevent interference;

R

R38

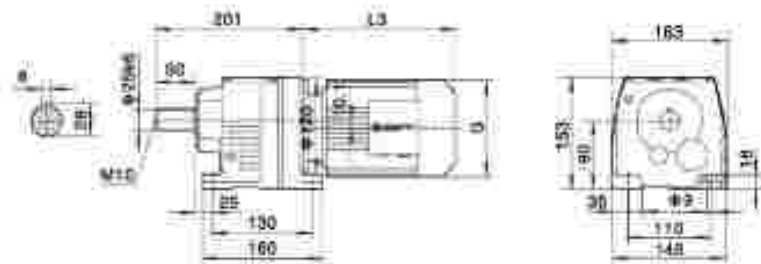

电机需方配时或特殊电机时需加联法兰
When equipping the user's motor or the special one, the flange is required to be connected.




R..S38

输入轴尺寸详见图17
Please find the size of input shaft on page 17





R..38 R18

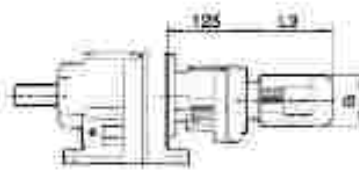

注：其他尺寸见相应的结构形式
Note: For other dimensions, see the corresponding structures

RF38

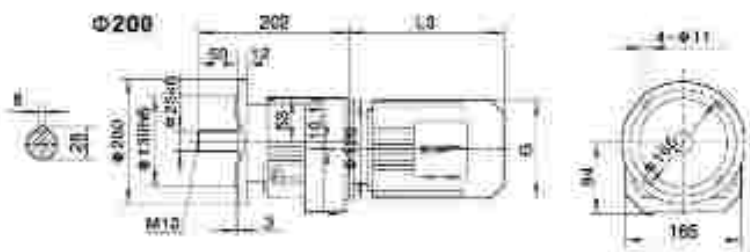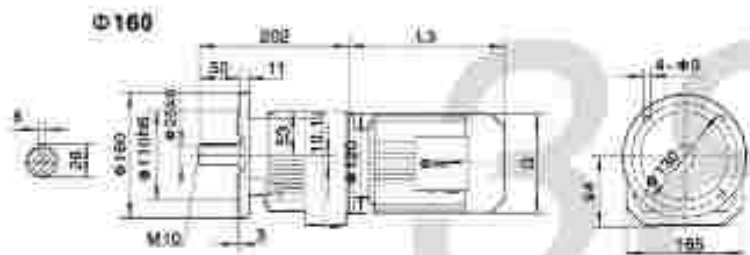

电机型号 Motor size 功率/P Power (kW)	63	71	80	90S	90L	100L
L3	235	250	263	308	333	347
G	130	145	175	195	195	215
L2	56	56	62	62	62	63


注：“R..”表示：R, RF Note：“R..”mean: R, RF

RF输出法兰螺栓会高出轴肩，安装时请注意让开，防止干涉！


The RF output flange bolts will protrude above the shaft shoulder, so be careful to move them away during installation to prevent interference!

R

R48

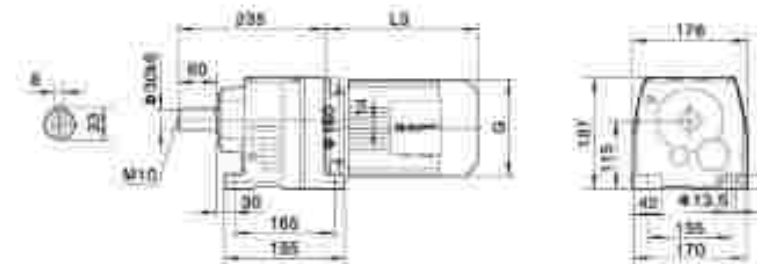

电机需方配时或特殊电机时需加联法兰
When equipping the user's motor or the special one, the flange is required to be connected.



R..S48

输入轴尺寸详见图17
Please find the size of input shaft on page 17





R..48 R38



注：其他尺寸见相应的结构形式
Note: For other dimensions, see the corresponding structures

RF48

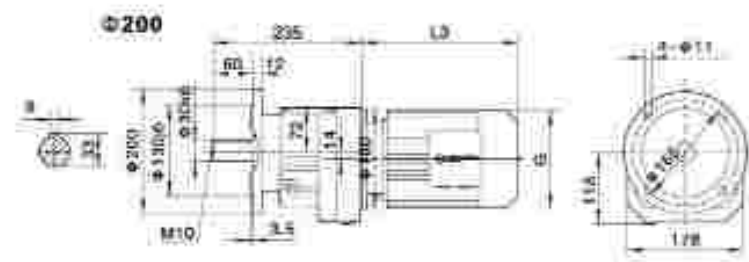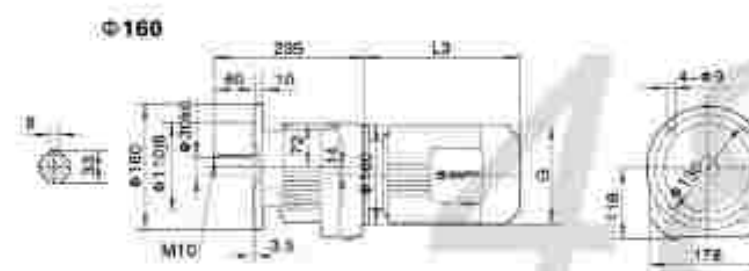


电机型号 Motor size 功率/P Power (kW)	63	71	80	90S	90L	100	112M	132S
L3	225	244	290	304	328	367	383	488
G	130	145	175	195	195	215	240	270
L2	56	57	72	72	72	74	74	82


注：“R..”表示：R, RF Note：“R..”mean: R, RF

R

R58

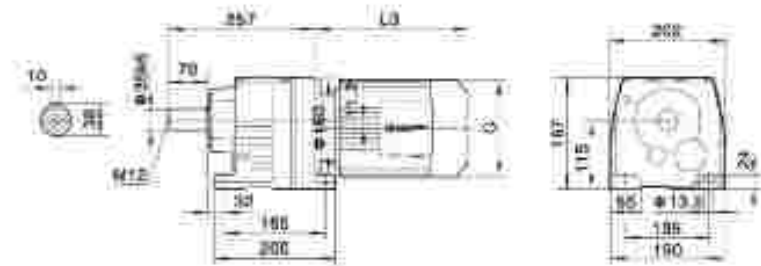


电机需力能匹配特殊电机时需加取接法兰
When equipping the user's motor or the special one, the flange is required to be connected.




RF58

Φ200

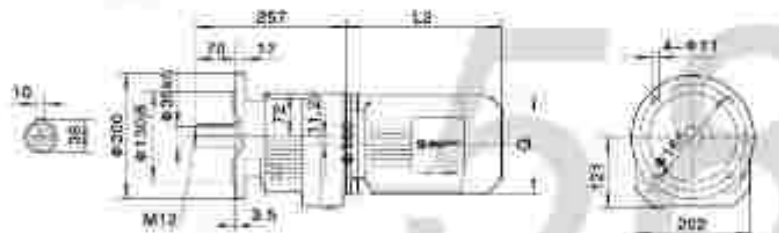


Φ250

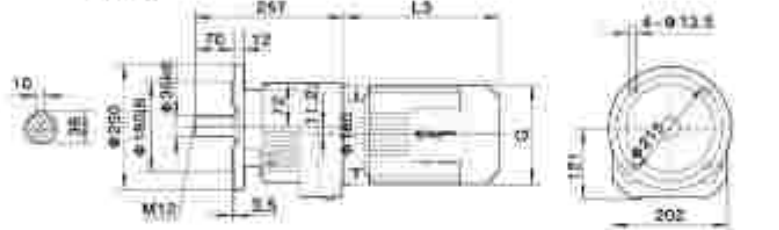


R..S58

输入轴尺寸请见第17页
Please find the size of input shaft on page 17



R..58 R38

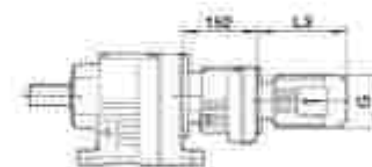


注：其余尺寸见标准结构形式
Note: For other dimensions, see the corresponding structure.

电机规格 Motor size 功率(P) Power (W)	63	71	80	90S	90L	100L	112M	132S	132M	
L3	225	244	293	304	329	357	383	428	461	
G	130	145	175	195	195	215	240	275	275	
L2	56	57	72	72	72	74	74	82	82	


注：* R.. 表示 R, RF Note: * R.. mean R, RF

R

R68

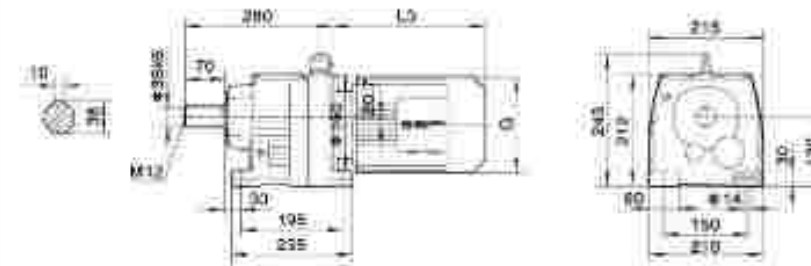


电机需力能匹配特殊电机时需加取接法兰
When equipping the user's motor or the special one, the flange is required to be connected.




RF68

Φ200

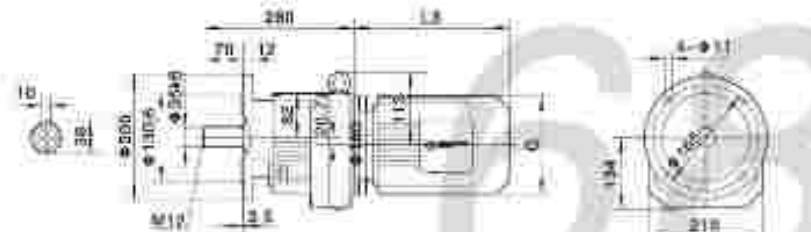


Φ250

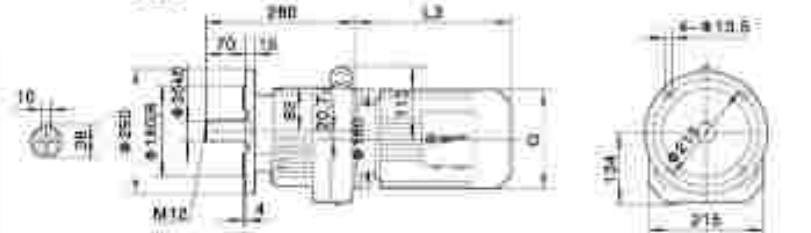


R..S68


输入轴尺寸请见第17页
Please find the size of input shaft on page 17



R..68 R38

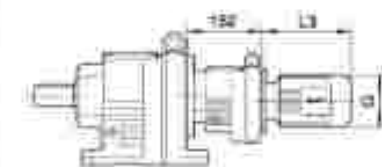

注：其余尺寸见标准结构形式
Note: For other dimensions, see the corresponding structure.

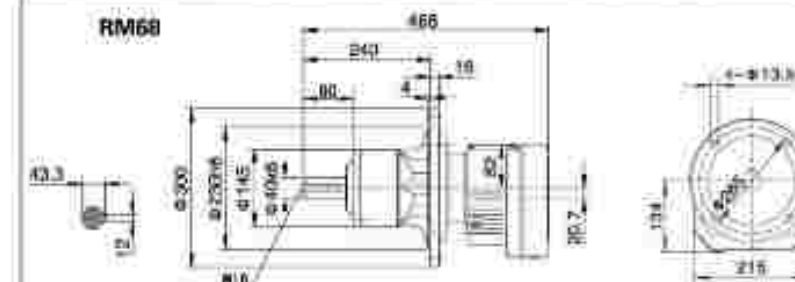

电机规格 Motor size 功率(P) Power (W)	63	71	80	90S	90L	100	112M	132S	132M	
L3	225	244	293	304	329	357	383	428	461	
G	130	145	175	195	195	215	240	275	275	
L2	56	57	72	72	72	74	74	82	82	


注：* R.. 表示 R, RF Note: * R.. mean R, RF

RF输出法兰螺栓会高出轴肩，安装时请注意让开，防止干涉；


The RF output flange bolts will protrude above the shaft shoulder, so be careful to move them away during installation to prevent interference;

R

R78

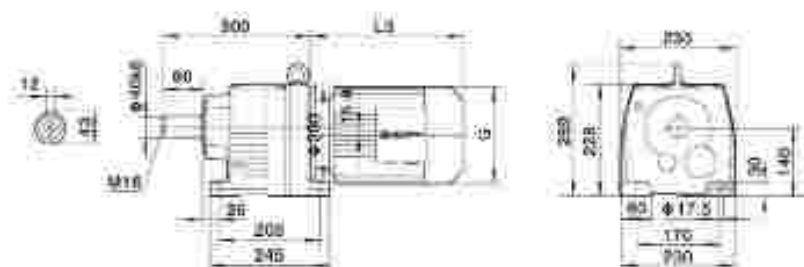


电机端方型时或特殊电机时需加联法兰
When equipping the user's motor or the special one, the flange is required to be connected.




RF78


Φ250

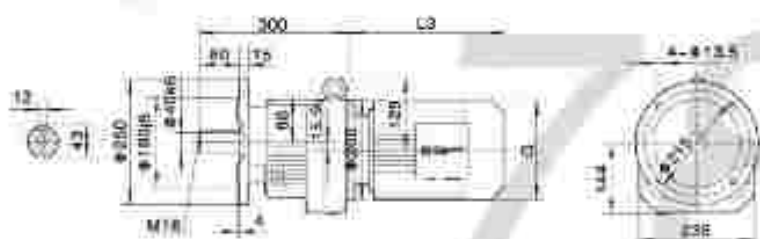

Φ300

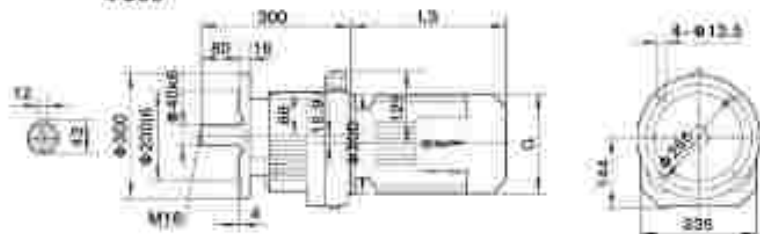


RM78

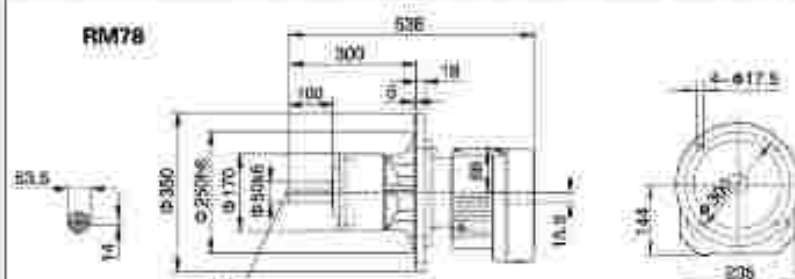


R..S78

输入轴轴径尺寸见第17页
Please find the size of input shaft on page 17



R..78 R38

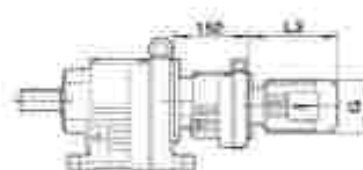

注：其他尺寸见相应结构形式
Note: For other dimensions, see the corresponding structure

电动机型号 Motor size 功率/kW Power/kW	83	71	60	90S	90L	100L	112M	132S	132M	160M
L3	223	237	292	287	322	354	391	430	453	555
G	150	145	175	155	185	215	240	275	275	330
L2	28	28	83.5	63.5	63.5	65	65	68	68	88


注：“R..”表示 R..RF Note: “R..”mean R..RF

RF输出法兰螺栓会高出轴肩，安装时需注意让开，防止干涉；


The RF output flange bolts will protrude above the shaft shoulder, so be careful to move them away during installation to prevent interference.

R

R88

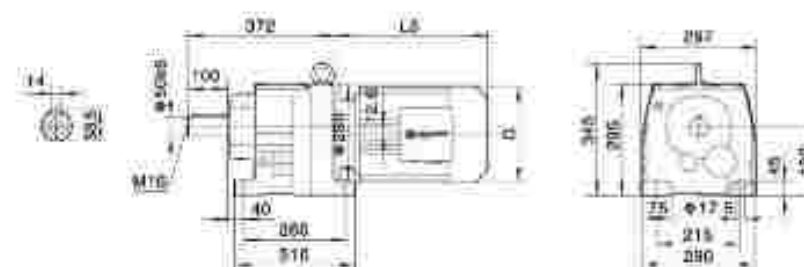


电机端方型时或特殊电机时需加联法兰
When equipping the user's motor or the special one, the flange is required to be connected.




RF88


Φ300

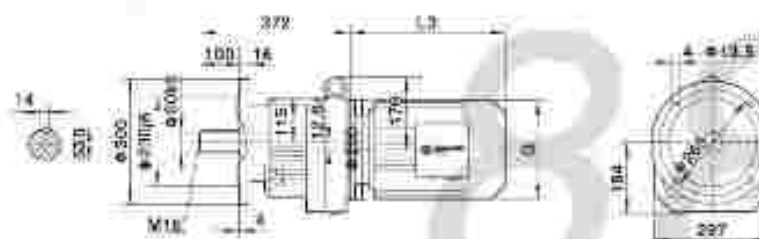

Φ350

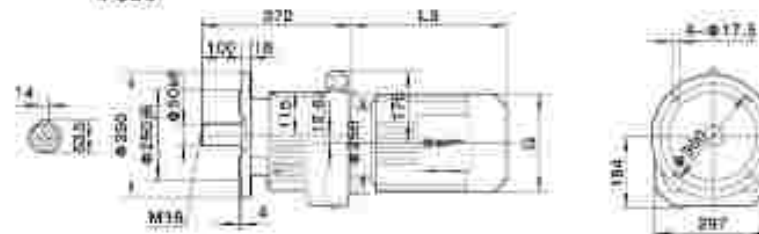


RM88

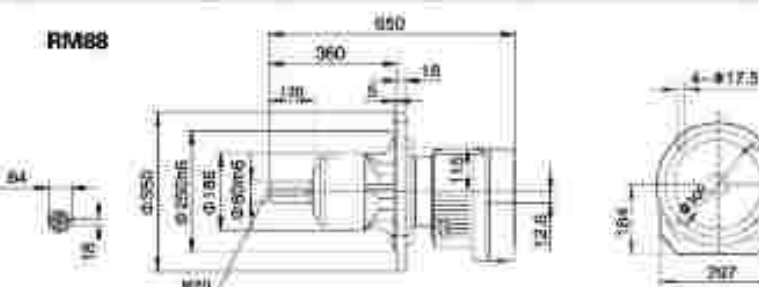


R..S88

输入轴轴径尺寸见第17页
Please find the size of input shaft on page 17



R..88 R58

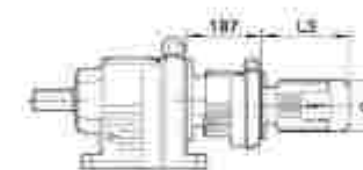


注：其他尺寸见相应结构形式
Note: For other dimensions, see the corresponding structure

电动机型号 Motor size 功率/kW Power/kW	80	90S	90L	100	112M	132S	132M	160M	160L	180M	180L
L3	261	284	309	331	371	417	450	538	583	612	633
G	175	195	185	215	240	275	275	330	330	380	388
L2	71	71	71	72	72	83	83	95	95	95	95

注：“R..”表示 R..RF Note: “R..”mean R..RF

R

R98

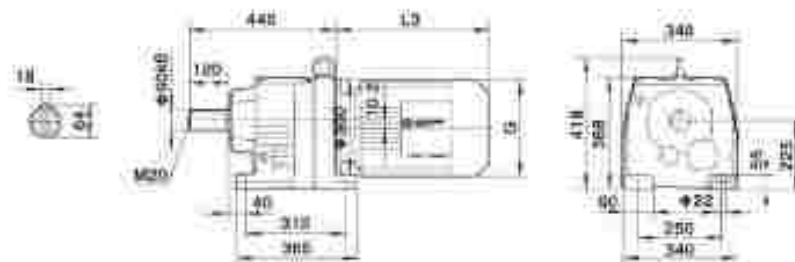


电机需方配时或特殊电机时加连接法兰
When equipping the user's motor or the special one, the flange is required to be connected.




RF98

Φ350

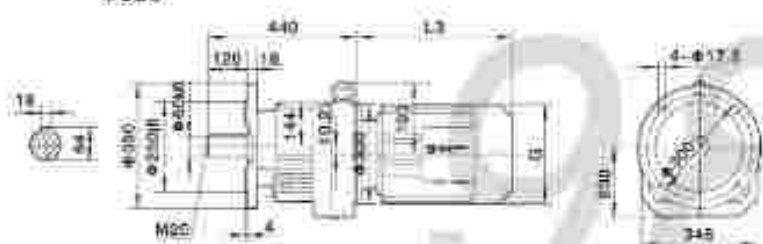


R..S98


输入轴尺寸详见图17
Please find the size of input shaft on page 17




Φ450

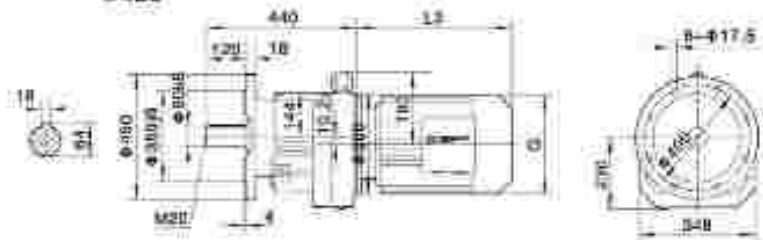

R..98 R58

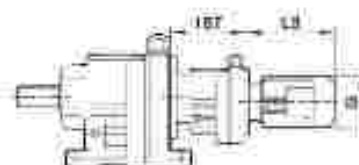

RM98

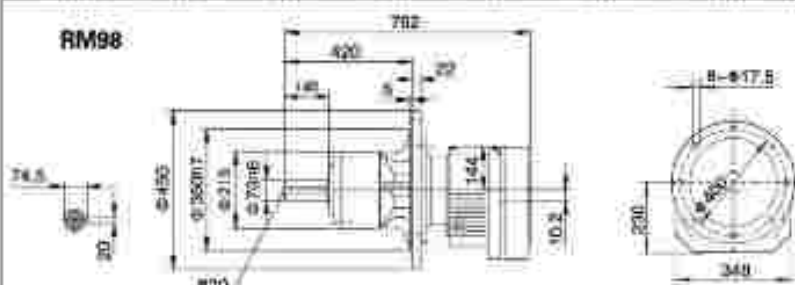

注：其余尺寸见相应的结构形式
Note: For other dimensions, see the corresponding structures

电机型号 Motor size	80	90S	90L	100	112M	132S	132M	160M	160L	180M	180L	200		
功率/kW Power(kW)	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11	15	18.5	22	30
L3	261	278	301	322	342	411	444	528	574	593	633	670		
G	175	198	198	215	240	275	275	330	330	360	360	420		
L2	50	50	50	50	50	77	77	113	113	113	113	105		


注：“R..”表示 R, RF Note: “R..”mean R, RF

R

R108




电机需方配时或特殊电机时加连接法兰
When equipping the user's motor or the special one, the flange is required to be connected.




RF108

Φ350

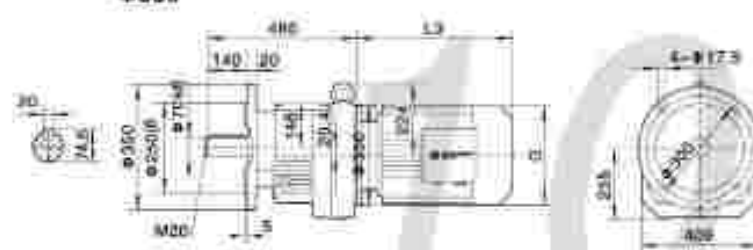


R..S108

输入轴尺寸详见图17
Please find the size of input shaft on page 17




Φ450

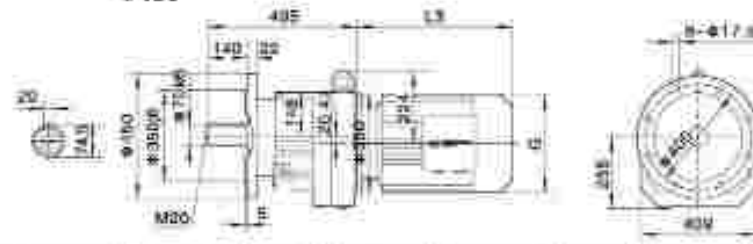

R..108 R78



RM108

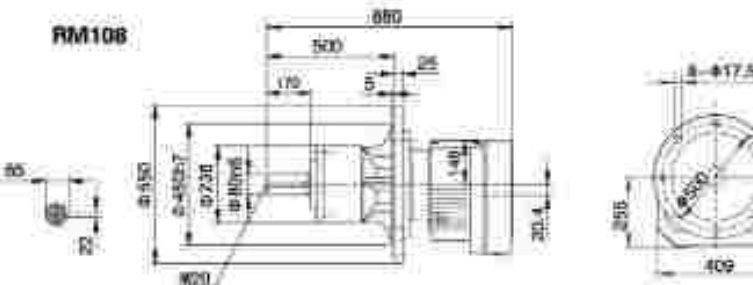


注：其余尺寸见相应的结构形式
Note: For other dimensions, see the corresponding structures

电机型号 Motor size	100	112M	132S	132M	160M	160L	180M	180L	200	225S	225M	
功率/kW Power/kW	2.2	3.0	4.0	5.5	7.5	11	15	18.5	22	30	37	45
L3	325	342	387	430	518	563	593	639	670	684	708	
G	215	240	275	275	330	330	360	360	420	470	470	
L2	55	55	77	77	112	112	112	112	105	121	121	


注：“R..”表示 R, RF Note: “R..”mean R, RF

R

R128

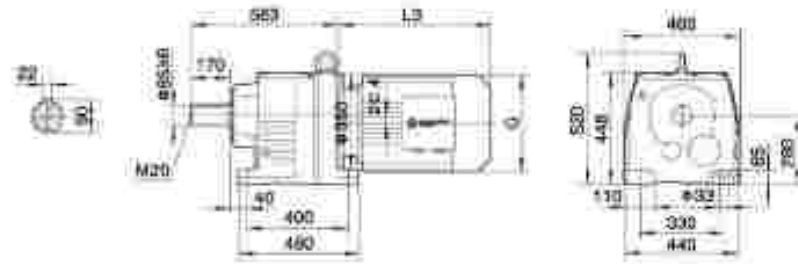


电机需方配时选配特殊电机时请加装法兰盘
When equipping the user's motor or the special one, the flange is required to be connected.




RF128

Φ450

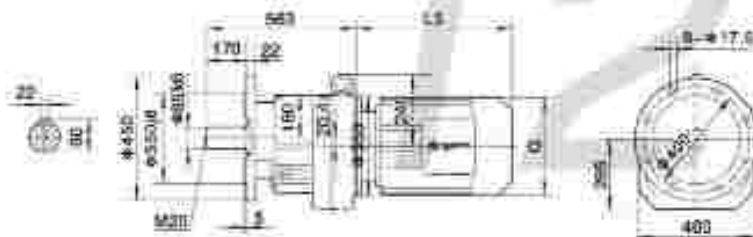


R..S128


输入轴尺寸详见第18页
Please find the size of input shaft on page 18



R..128 R78

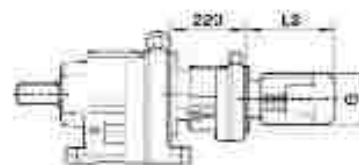

Φ550

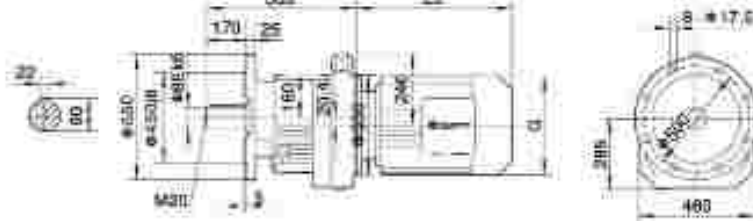


注：其余尺寸见相应的结构形式
Note: For other dimensions, see the corresponding structures

电机机座号 Motor Size 功率/kW Power(kW)	100	112M	132S	132M	160M	160L	180M	180L	200	225S	225M
	2.2 3.0	4.0	5.5	7.5	11	15	18.5	22	30	37	45
L3	325	342	397	430	518	583	593	630	670	684	709
G	215	240	275	275	330	330	380	380	420	470	470
L2	55	55	77	77	112	112	112	112	105	121	121


注：“R..”表示 R, RF Note: “R..”mean R, RF

R

R138

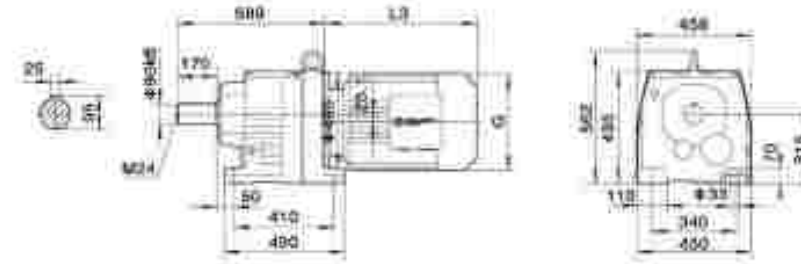


电机需方配时选配特殊电机时请加装法兰盘
When equipping the user's motor or the special one, the flange is required to be connected.




RF138

Φ450

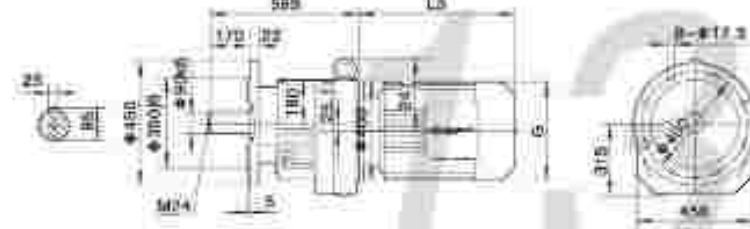


R..S138

输入轴尺寸详见第18页
Please find the size of input shaft on page 18



R..138 R78

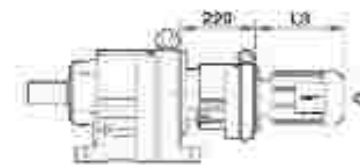


Φ550



注：其余尺寸见相应的结构形式
Note: For other dimensions, see the corresponding structures

RM138

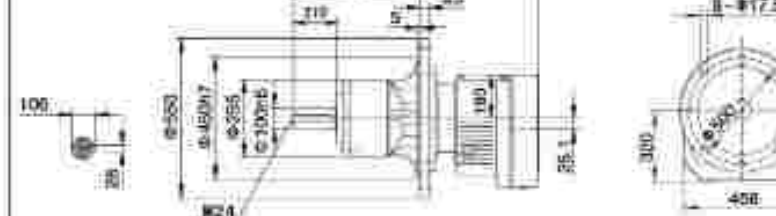


电机机座号 Motor Size	132S	132M	160M	160L	180M	180L	200	225S	225M	250
功率/kW Power/kW	5.5	7.5	11	15	18.5	22	30	37	45	55
L3	398	429	518	583	593	633	658	684	709	784
G	275	275	335	330	380	380	470	475	475	518
L2	72	72	89	85	88	88	104	114	114	147

注：“R..”表示 R, RF Note: “R..”mean R, RF





R168





RF108



(0550



©650

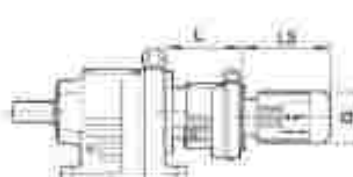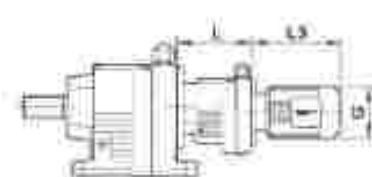

RM158




电机功率 Motor Size P2 (kW)	100M	160L	180M	180L	200	225S	225M	250	300S	280M	315S	315M	315L
1.1	11	15	18.5	22	30	37	45	55	75	90	112	132	160
1.5	15	20	25	30	37	45	55	75	90	112	132	160	180
2.2	22	30	37	45	55	75	90	112	132	160	180	200	220
3.0	30	37	45	55	75	90	112	132	160	180	200	220	250
4.0	40	50	60	75	90	112	132	160	180	200	220	250	280
5.5	50	60	75	90	112	132	160	180	200	220	250	280	315
7.5	75	90	112	132	160	180	200	220	250	280	315	350	380
11.0	110	132	160	180	200	220	250	280	315	350	380	420	450
15.0	150	180	200	220	250	280	315	350	380	420	450	480	500
22.0	220	250	280	315	350	380	420	450	480	500	550	580	600
30.0	300	350	380	420	450	480	500	550	580	600	650	680	700
40.0	400	450	480	500	550	580	600	650	680	700	750	780	800
55.0	550	600	650	680	700	750	780	800	850	880	900	950	980
75.0	750	800	850	880	900	950	980	1000	1050	1080	1100	1150	1180
110.0	1100	1150	1180	1200	1250	1280	1300	1350	1380	1400	1450	1480	1500
150.0	1500	1550	1580	1600	1650	1680	1700	1750	1780	1800	1850	1880	1900
200.0	2000	2050	2080	2100	2150	2180	2200	2250	2280	2300	2350	2380	2400
250.0	2500	2550	2580	2600	2650	2680	2700	2750	2780	2800	2850	2880	2900
300.0	3000	3050	3080	3100	3150	3180	3200	3250	3280	3300	3350	3380	3400
350.0	3500	3550	3580	3600	3650	3680	3700	3750	3780	3800	3850	3880	3900
400.0	4000	4050	4080	4100	4150	4180	4200	4250	4280	4300	4350	4380	4400
450.0	4500	4550	4580	4600	4650	4680	4700	4750	4780	4800	4850	4880	4900
500.0	5000	5050	5080	5100	5150	5180	5200	5250	5280	5300	5350	5380	5400
550.0	5500	5550	5580	5600	5650	5680	5700	5750	5780	5800	5850	5880	5900
600.0	6000	6050	6080	6100	6150	6180	6200	6250	6280	6300	6350	6380	6400
650.0	6500	6550	6580	6600	6650	6680	6700	6750	6780	6800	6850	6880	6900
700.0	7000	7050	7080	7100	7150	7180	7200	7250	7280	7300	7350	7380	7400
750.0	7500	7550	7580	7600	7650	7680	7700	7750	7780	7800	7850	7880	7900
800.0	8000	8050	8080	8100	8150	8180	8200	8250	8280	8300	8350	8380	8400
850.0	8500	8550	8580	8600	8650	8680	8700	8750	8780	8800	8850	8880	8900
900.0	9000	9050	9080	9100	9150	9180	9200	9250	9280	9300	9350	9380	9400
950.0	9500	9550	9580	9600	9650	9680	9700	9750	9780	9800	9850	9880	9900
1000.0	10000	10050	10080	10100	10150	10180	10200	10250	10280	10300	10350	10380	10400


註: “R.”表示 R. RF Note: “R.” means R. RF

R


R178

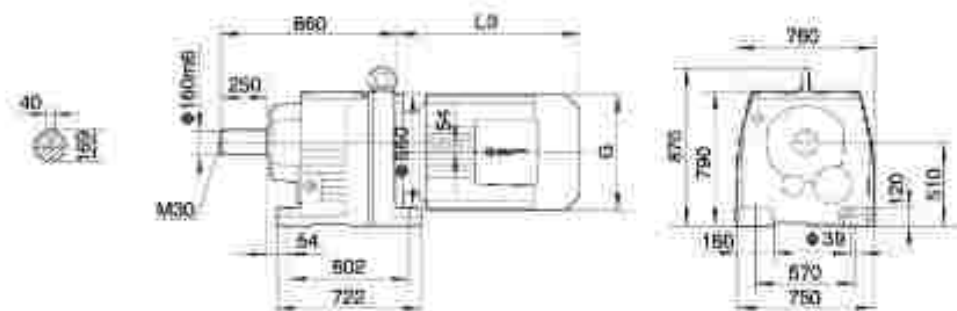


RF178
Φ660

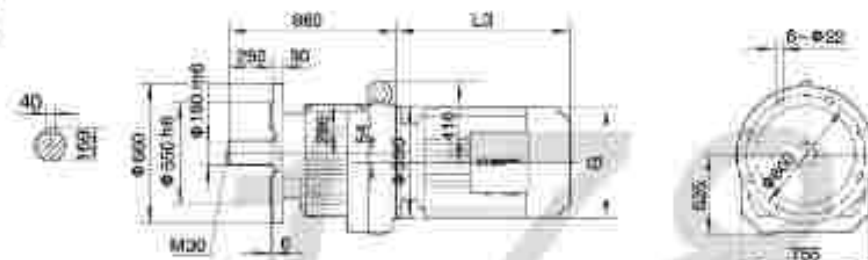

Φ880

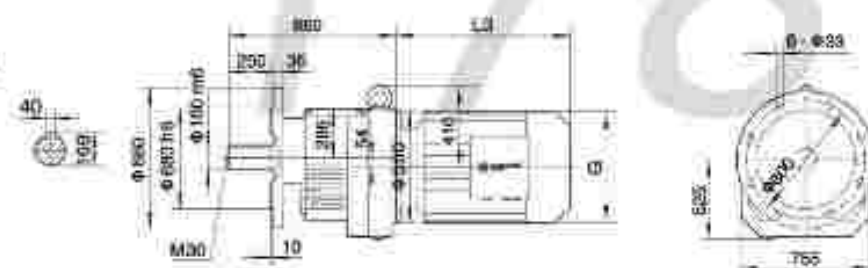

电机需方配时或配特殊电机时需加联接法兰
When equipping the user's motor or the special one, the flange is required to be connected.




R.S178

输入轴尺寸详见第18页
Please find the size of input shaft on page 18.




电机规格 Motor size 功率/kW Power/kW	160M	160L	180M	180L	200	225S	225M	250	280S	280M	315S	315M	315L
L3	480	537	593	633	646	673	698	779	847	847	1100	1180	1080
G	330	330	380	380	420	470	470	510	580	580	845	845	845
L2	88	88	88	88	88	120	120	133	133	133	149	149	149


R188

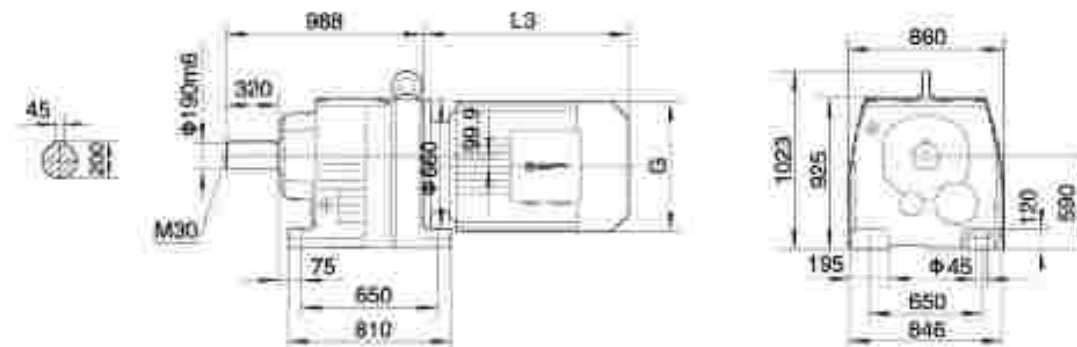

RF188
Φ880

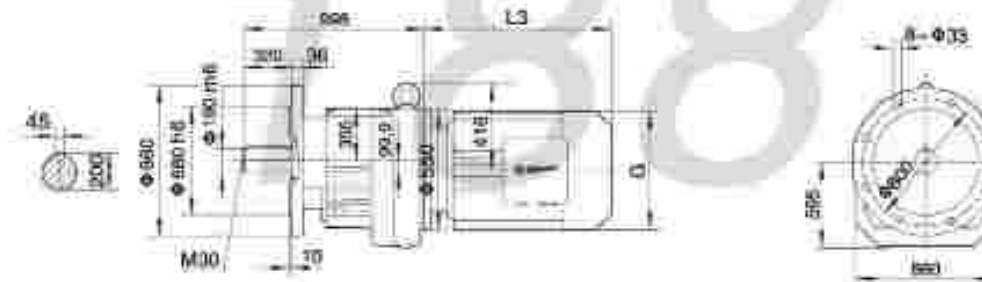


电机需方配时或配特殊电机时需加联接法兰
When equipping the user's motor or the special one, the flange is required to be connected.



R.S188

输入轴尺寸详见第18页
Please find the size of input shaft on page 18.

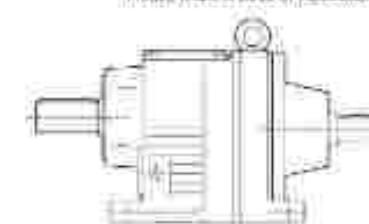

电机规格 Motor size 功率/kW Power/kW	160M	160L	180M	180L	200	225S	225M	250	280S	280M	315S	315M	315L
L3	525	570	628	668	679	706	731	812	880	880	1135	1213	1380
G	330	330	380	380	420	470	470	510	580	580	845	845	845
L2	118	118	119	119	119	153	153	166	166	166	182	182	182

R